

Please read carefully the notes about this catalogue! This catalogue may show images of products with accessories, which are not part of Sets or single units. Elinchrom Set and single unit configurations may change without advise and they might be different in other countries. Please find actual configurations at www.elinchrom.com

For further details, upgrades, news, the latest information about the Elinchrom System, please visit frequently the Elinchrom website. In the Support area, the latest user guides and technical specifications can be downloaded. Technical data, features and functions of Elinchrom flash units and the EL-Skyport system may change without advise.

Tolerances of specifications and components conform to IEC and CE standards. The listed values can differ due to tolerances in components, or measuring instruments. Technical data, subject to change. No guarantee for misprints.

Follow us

Facebook / ElinchromLTD / www.facebook.com/ElinchromLTD Twitter / @ElinchromLTD / www.twitter.com/ElinchromLTD Instagram / elinchrom_ltd / www.instagram.com/elinchrom_ltd Pinterest / elinchrom / www.pinterest.com/elinchrom

Copyright

Cover, p.2, p4-5, 14, p18-19, p36 © Anoush Abrar p.61, p71 © Tristan Shu p.27, p38-39, p54-55 © Julien Palmilha

EDITORIAL

This catalogue contains the most up to date presentation of the Elinchrom product range. It demonstrates our shared Lighting expertise spanning more than 50 years. Within this you will find full details of our new products for this year, and with them an insight into our future direction.

ELB 400, the most portable and versatile flash solution, for outdoor and indoor photographers.

Litemotiv, the most powerful, large, deep professional softbox system

FS30, our classical cinema light, refined for fashion and beauty photography

Roller cases, designed to move with you as easily as your shadow and ensuring optimum contents protection.

Whilst innovation is essential, many of the original concepts have come from customers and these products are each therefore dedicated to one objective. Empowering you.

Enabling you to capitalise on your expertise and imagination, whilst captivating your audience with your creative talent. Time after time.

Our materials and component selection assures class leading performance within every category, whilst delivering a consistently high level of product resilience for the most demanding applications.

We partner worldwide with the finest national distributors. Selected to share all our ambitions, they ensure that together we can support you locally with the technical and product expertise required, to simplify even the most complicated of jobs.

Elinchrom, living light.

Chris Whittle President



CONTENTS

COMPACTS	Starters – D-Lite RX ONE Advanced – D-Lite RX 2 & 4 Prosumer – BRX Professional – ELC Pro HD	6 8 10 12
POWER PACKS	Digital RX Digital RX – Accessories	15 16
BATTERY FLASH SYSTEM	ELB 400 ELB – Accessories Ranger RX Speed AS Ranger RX – Accessories	20 21 24 25
RADIO REMOTE SYSTEM	EL – Skyport	28
CONTINUOUS LIGHT	Scanlite	37
LIGHT SHAPERS	Litemotiv Softbox Indirect Softbox Rotalux Softbox Special Effect Lights Reflector & Grids Softlites Reflectors Deflectors & Filter Umbrellas	40 42 44 47 48 50 51 52
ACCESSORIES	Tripods Tripods & Bags Cases & Notebook Table Sync Cords	56 57 58 59
POWER SPECIFICATIONS	Last but not least	62
EL-CHART		72



COMPACTS

D-LITE RX ONE

Delivering approximately twice the power of speedlights, the D-Lite RX ONE is a small but robust compact flash from Elinchrom.

The versatility of the Elinchrom system remains in its accessory range: where it is difficult to change the hard nature that characterises speedlights, Elinchrom has some of the best accessories allowing photographers to change the nature of their light, to suit their style.

Used on location, the D-Lite RX ONE is the perfect creative companion to an existing Speedlight system, making use of the built-in intelligent slave cell to offer perfect flash synchronisation. This is the ONE, where it all begins ...



D-Lite RX ONE — 100 Ws N° 20485.1

FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting.
- 5V sync socket for maximum protection of digital cameras.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).
- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10
- User replaceable plug-in flash tube.

- Programmable ready beep tone.
- Power auto-dump.
- Temperature controlled cooling fan.
- Intelligent pre-flash detector system enables to use speedlights.

WHY D-LITE RX ONE?

- 100 Ws down to 6 Ws power range, perfect for small environments and shallow depth of focus.
- Very short flash durations offer sharper images.
- Exceptional colour balance across the power range.
- Integrates fully into the Elinchrom flash and accessory systems.

CONTROL PANEL



D-LITE RX ONE — SETS

The Softbox Set is ideal for use in small spaces where light control is essential to avoid unwanted reflections, whereas the Umbrella Set is ideal for use in large halls and open spaces where speed of assembly is an advantage. The new 3 Head Set gives photographers extra versatility to be creative with an extra light source.

D-LITE RX ONE SOFTBOX SET

N° 20843.2

Qty	Code n°	Article
2x	20485.1	D-Lite RX ONE
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m
2x	26129	Portalite softbox 66 x 66 cm
lx	33194	Carrying bag for D-Lite RX ONE
lx	30162	Tripod set 2 (2x 88 – 235 cm with bag)





D-LITE RX ONE 3 HEAD SET

N° 20844.2

N° 20845.3

Qty	Code n°	Article
3x	20485.1	D-Lite RX ONE
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m
2x	26143	Reflector 16 cm / 90°
lx	26372	Pro umbrella white 85 cm
lx	26351	Eco umbrella translucent 85 cm
lx	26129	Portalite softbox 66 x 66 cm
lx	33194	Carrying bag for D-Lite RX ONE
lx	30161	Tripod set 3 (3x 88 - 235 cm with bag)



D-LITE RX ONE UMBRELLA SET

Qty	Code n°	Article
2x	20485.1	D-Lite RX ONE
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m
2x	26143	Reflector 16 cm / 90°
lx	26372	Umbrella white 85 cm
lx	26351	Eco umbrella translucent 85 cm
lx	33194	Carrying bag for D-Lite RX ONE
lx	30162	Tripod set 2 (2x 88 – 235 cm with bag)

D-LITE RX

The D-Lite RX 2 and 4 are one step up in the Elinchrom studio flash family, offering a more robust case with ergonomic handle for harder working with larger accessories.

With 200Ws or 400Ws, these units are ideal for small business applications, portraiture and for everyone interested in the most creative lighting.

These Swiss designed and tested units will not only give many years of reliable service and pleasure, but also make it extremely easy to upgrade your lighting as your interest and need grows.

The Skyport remote control built into the Elinchrom units offers cordless triggering and control of power and modelling lamp from the camera, and control of all functions from many other common devices.





D-Lite RX 2 — 200 Ws — N° 20486.1

D-Lite RX 4 — 400 Ws — N° 20487.1

FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting.
- Intelligent pre-flash detector system enables the full use of D-Lite RX 2/4 with speedlights.
- 5V sync socket for maximum protection of digital cameras.
- Temperature controlled cooling fan.
- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10
- Programmable ready beep tone.
- The accessory bayonet accepts all accessories and Rotalux softboxes up to 135 cm.

- Centred 7 mm umbrella shaft enables also the use of the unique Elinchrom Deflector set.
- Stand bracket with additional umbrella fitting for larger umbrella shafts.
- User replaceable plug-in flash tube.
- Power auto-dump.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).

WHY D-LITE RX 2/4?

- 200 and 400 Ws units offer greater versatility.
- Faster recycling for faster work.
- Large rubberised business-like handle for easy use of larger accessories.

CONTROL PANEL



D-LITE RX — SETS

The D-Lite RX sets are very quick to assemble. With only two bags, the complete studio is very portable and is easily stored until its next use. The 2/2 and the 4/4 kits come with two 66 x 66 cm softboxes and when used with the optional Deflector Set, can also offer beauty dish type lighting effects.



D-LITE RX 2/4 TO GO N° 208		N° 20840.2	
Qty	Code n°	Article	
lx	20486.1	D-Lite RX 2	
lx	20487.1	D-Lite RX 4	
lx	19350	EL-Skyport Transmitter Speed	
lx	11088	Sync cable 5 m	
2x	26143	Reflector 16 cm / 90°	
lx	26350	Eco umbrella black & silver 85 cm	
lx	26351	Eco umbrella translucent 85 cm	
lx	33198	Carrying bag for two D-Lite RX	
lx	30162	Tripod set 2 (2x 88 – 235 cm with bag)	

D-LITE RX 2 TO GO

N° 20841.2

Qty	Code n°	Article
2x	20486.1	D-Lite RX 2
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m
2x	26129	Portalite softbox 66 x 66 cm
lx	26143	Reflector 16 cm / 90°
lx	33198	Carrying bag for two D-Lite RX
lx	30162	Tripod set 2 (2x 88 – 235 cm with bag)



D-LITE RX 4 TO GO

N° 20842.2

Qty	Code n°	Article
2x	20487.1	D-Lite RX 4
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m
2x	26129	Portalite softbox 66 x 66 cm
lx	26143	Reflector 16 cm / 90°
lx	33198	Carrying bag for two D-Lite RX
lx	30162	Tripod set 2 (2x 88 – 235 cm with bag)



BRX

The BRX compact flash units are a further evolution of the features and quality that are Elinchrom.

The concept is simple: control, power, speed and versatility. With many programmable features and the EL-Skyport remote system, the BRX enables photographers the greatest freedom to express their individuality. The BRX series delivers the quality of performance needed for a modern workflow.

The flash duration and the fast recycling times they provide is great to have when shooting moving subjects. Available in either 250 Ws or 500 Ws, they are perfect for portraiture, product and architectural photography.



BRX 250 — 250 Ws — N° 20440.1



BRX 500 — 500 Ws — N° 20441.1

FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting.
- Intelligent pre-flash detector system enables the full use of BRX 250 / 500 with speedlights.
- 5V sync socket for maximum protection of digital cameras.
- Temperature controlled cooling fan.

- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Variable f-stop steps: 1/1, 1/2, 4/10, 1/3, 2/10 or 1/10 steps are available.
- Programmable ready beep tone.
- The accessory bayonet accepts the complete range of light modifiers.

- Centred 7 mm umbrella shaft enables also the use of the unique Elinchrom Deflector set.
- Stand bracket with additional umbrella fitting for larger umbrella shafts.
- User replaceable plug-in flash tube.
- Power auto-dump.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).

WHY BRX 250/500?

- Super short flash durations with our A (Action) flashtube.
- Rigid chassis enables the largest accessories to be used.
- High capacity intelligent fan cooling offers higher work capacity.
- Independent modelling lamp control.

CONTROL PANEL



BRX — SETS

The BRX basic sets all fit it to one bag for easy transportation. Optional stand sets are available depending on your needs, such as the 88-235 cm stands or air cushioned 105-264 cm stands. All sets come with two Portalites, which when combined with the optional deflector set, take advantage of the unique Elinchrom central shaft.



BRX 2	BRX 250/500 TO GO		N° 20757.2
Qty	Code n°	Article	
lx	20440.1	BRX 250	
lx	20441.1	BRX 500	
lx	19350	EL-Skyport Transmitter Speed	
lx	11088	Sync cable 5 m	
2x	26129	Portalite softbox 66 x 66 cm	
lx	33199	Tube bag for 2 BRX	
		Tripods are not included	

BRX 250/250 TO GO

N° 20756.2

Qty	Code n°	Article
2x	20440.1	BRX 250
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m
2x	26129	Portalite softbox 66 x 66 cm
lx	33199	Tube bag for 2 BRX
		Tripods are not included





BRX 500/500 TO GO

N° 20758.2

2x 20441.1 BRX 500, mains cable, flashtube, modelling lamp	
1x 19350 EL-Skyport Transmitter Speed	
lx 11088 Sync cable 5 m	
2x 26129 Portalite softbox 66 x 66 cm	
1x 33199 Tube bag for 2 BRX	
Tripods are not included	

Optional Tripod Sets

Qty	Code n°	Article
lx	30162	Tripod set 2 (2x 88 – 235 cm with bag)
lx	31052	Tripod Air set (2x air cushioned 105 - 264 cm with bag)

SWISS STUDIO FLASH SYSTEM

The ELC Pro HD compact is Elinchrom's latest unit.

Available as either 500 Ws or 1000 Ws these units are the highest performing and most professional units on the market.

Equipped with an OLED display for an easy and precise user experience the ELC Pro HD benefits from cutting edge technology.

Recycling times are lightning fast while Swiss precision guarantees consistant power time after time, shot after shot.

But hardware isn't all. The software built into this unit gives you the freedom to configure the ELC to your individual style of shooting, for every application.



ELC Pro HD 500 — 500 Ws — N° 20613.1 **ELC Pro HD 1000** — 1000 Ws — N° 20616.1

FEATURES

- Skyport delivers the most comprehensive synchronisation and control, and it's unique to the whole Elinchrom system. Your creative edge in lighting.
- Intelligent pre-flash detector system enables full use with speedlights.
- Power auto-dump.
- 5V sync socket for maximum protection of digital cameras.
- Intelligent thermally controlled, low noise cooling fan.
- Multi-voltage auto-detection: 90-270 V (excluding modelling lamp).

- Visual Flash Confirmation option. The modelling lamp switches off/on to confirm the flash has been triggered.
- Adjustable proportionality of the modelling lamp range.
- Programmable ready beep tone.The accessory bayonet accepts
- all accessories. – Centred 7 mm umbrella shaft enables also the use of the unique Elinchrom Deflector set.
- User replaceable plug-in high performance flash tube

WHY ELC PRO HD 500/1000?

- Superfast flash durations across the complete power range with visual confirmation on the OLED display.
- ELC Pro HD 500: up to 1/5000s
 ELC Pro HD 1000: up to 1/5260s
- Huge power range;
 ELC Pro HD 500 7 f-stops and
 ELC Pro HD 1000 8 f-stops.
- User selectable and even shorter recycling times. Now you will never miss a shot!
- Even better colour and power stability.
- Unique OLED power display for information and clarity.

- Three unique creative modes; Strobo mode, up to 20 Hz
- Delayed mode, from 0.001 10s, for second curtain sync and other effects.
- Sequence mode, up to 20 units can be synchronised in sequence to keep up with the fastest motor-drive at up to the full power of the flash.
- All special features utilise the full flash curve with normal colour balance.

CONTROL PANEL



Depending upon how much power you need there are various ELC Pro HD sets available each of which fit into one elegant carrybag. Optional stand sets are available depending on your needs.



ELC PRO HD 500/500 TO GO

N° 20666.2

Qty	Code n°	Article
2x	20613.1	ELC Pro HD 500; incl. 300 W halogen lamp
2x	24916	Glass dome transparent
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m
2x	26143	Wide reflector 16cm 90°
lx	33196	ProTec Bag Poly
		Tripods are not included

ELC PRO HD 1000/1000 TO GO N°		
Qty	Code n°	Article
2x	20616.1	ELC Pro HD 1000; incl. 300 W halogen lamp
2x	24916	Glass dome transparent
lx	19350	EL-Skyport Transmitter Speed
lx	11088	Sync cable 5 m

N° 20667.2



Tripod Sets 1 (Optional)

26143

33196

2x

lx

Qty	Code n°	Article
lx	30162	Tripod set 2 (2x 88 – 235 cm with bag)
The 10 - 0 (0 - 1 - 1)		

Wide reflector 16cm 90°

Tripods are not included

ProTec Bag Poly

Tripod Sets 2 (Optional)

Qty	Code n°	Article
lx	31052	Tripod Air set (2x air cushioned 105 – 264 cm with bag)



DIGITAL RX

Elinchrom has a long tradition of excellent power packs designed for professional imaging.

The latest Digital RX series incorporates electronic know-how combined with high manufacturing quality at attractive prices. Highlights such as control via MAC[®] / WIN[®] computers, remote control with the EL-Skyport App for iPod Touch[®] / iPad[®] / iPhone[®], ultra stable circuitry for consistent flash power, low sync voltage to protect digital cameras, these are just some of the many advantages of this series.

FEATURES

- EL-Skyport: radio remote control and triggering! Adjust power and switch on/off the modelling lamp with the Skyport Transmitter speed and the Transceiver RX, from the camera.
- Unique control from an iPod Touch °/iPad °/iPhone ° with the EL-Skyport App via the optional WiFi module.
- Link your complete RX studio with the EL-Skyport Software, control up to 4 studios of 16 units with EL-Skyport and access extra features like flash counter or flash delay for strobing effects.
- Ultra stable circuitry for absolutely consistent flash power.

- Unique dedicated Zoom Pro HD flash head for heavy-duty use.
- High speed Zoom Action and Zoom Pro heads for fashion and general purpose photography.
- Digital power display for precise and repeatable exposures.
- Digital power values compatible with the Elinchrom system.
- Modelling lamps proportional or independently controlled.
- Fast recycling consistent with precision and stability.
- Surge resistant circuits, Auto-dump, twin sync sockets, ready beep, sensitive photocell, anti shock edgings and fan cooled.



Digital 1200 RX | 1200 Ws 230 V — N° 10256.1s 110 V — N° 10255.1s

 IIO V
 N° 10255.1s

 Digital 2400 RX | 2400 Ws

 230 V
 N° 10258.1s

 110 V
 N° 10257.1s

 RX Hand Remote Control
 N° 19342





ZOOM HEADS


These flash heads offer a new focusable flashtube and modelling lamp arrangement, to fine tune the lightnig characteristic of every accessory filted.

They also incorporate a microprocessor controlled low noise fan cooling system, a new transparent glass dome and a new user replaceable plug-in flashtube. The zoom function is accessible from both sides of the head housing. These heads are compatible with all power packs made by Elinchrom since 1979.

CARACTERISTICS & FEATURES

- Small UV coated flashtube diameters for short flash durations and better light control.
- User replaceable plug-in flashtube.
- Transparent security glass dome. An optional frosted glass dome is available.
- Zoom Heads can either be used with 110 V or 230 V Elinchrom power packs. The halogen modelling lamp and fuse must conform to the correct mains voltage and value.
- Efficient inner dish reflector, with a 90° light distribution to maximise light output.
- Zoom function for flashtube and modelling lamp for individual light control.
- Reflector-bayonet with breech locking ring, fits all Elinchrom accessories since 1974.

- Centered umbrella fitting with additional umbrella holder on the tilt head.
- Efficient low noise fan cooling. The fan spins slowly at low temperatures and fast when the head heats up.
- Illuminated on/off modelling lamp switch, with LED overheat indication. When the red warning LED lights up the halogen modelling lamp shuts off until the head cools down. The flash function is still active.
- Aluminium chassis with fire resistant housing.
- Extremely lightweight, only 2.3 kg, including the 5 m heavy-duty flash cable.





Zoom Pro HD

N° 20192

The ZOOM PRO HD is designed to withstand extreme use. The heavy-duty and high quality plug-in flashtube offers long and consistent performance. The ZOOM PRO HD is the best choice for intensive catalogue, 3D turntable imaging.



Zoom Action N° 20193

The ZOOM ACTION offers a very short flash duration for action freezing photography. The new A (Action) tube delivers a 40-45% shorter flash duration compared to standard omega (horseshoe type) flashtubes. Action = Elinchrom.



Zoom Pro N° 20191

The ZOOM PRO is designed for general use and is equipped with a standard 3000 Ws omega plug-in flashtube it offers a spectacular balance of performance and value.

BIGITAL RX - PACK AND HEAD ACCESSORIES



Glass Dome Transparent N° 24918

Included standard glass dome for the ZOOM flash head and SCANLITE Halogen.



Glass Dome Frosted N° 24919

This frosted glass dome will soften edges of shadows and offer a wider even light distribution while protecting the halogen lamp. Fits all Zoom heads and SCANLITE Halogen.



Ringflash Glass-Diffuser N° 402.013 Diffuse the ringflash by replacing the protection glass filter

with this matt glass diffuser.

Ringflash 3000

N° 20494 Dedicated to I

Dedicated to EL powerpacks, this fashionable light source allows most cameras to be fitted within the centre. The RF 3000 has a 4-pole flashtube which provides very short flash durations.





Plug-In flashtube for **Zoom Pro HD** — N° 24082



Plug-In flashtube for **Zoom Pro** — N° 24081

Plug-In flashtube for **Zoom Action** — N° 24083





ZOOM Head Extension Cable 5 m — N° 21040 **10 m** — N° 21041



HALOGEN LAMPS

MAX. 300 W / 230 V Halogen GX 6.35 — N° 23022 MAX. 300 W / 110 V Halogen GX 6.35 — N° 23030



ProTec Bag Poly N° 33196 This high quality nylon shoulder bag enables photographers to safely carry and store up to 1 Digital RX pack and 1 Zoom head.

L x W x H: 39 x 28 x 37 cm



BATTERY FLASH SYSTEM

ELB 400

This is the most complete and portable off-camera flash system. Specifically designed for photographers who travel light whilst packing enough power to overpower the sun. The best flash duration is at full power, just where you need it when you are out on a sunny location. The built-in Skyport system provides seamless synchronisation and control between your camera and the ELB 400. The OLED display features are rich, with quick and easy access to all functions.

FEATURES

- 424 Ws in the palm of your hand.
- 20% faster recycling time.
- 25% more from the same weight. 350 full power flashes.
- Lifetime battery performance optimised, even recovering deeply discharged cells.
- OLED display with intuitive control of existing functions, providing simple control of all the new functions; Strobo, Sequence and Delayed flash.
- Next generation Skyport to offer more of everything.
- Tiny flash heads with full sized performance.
- Compatible with the Elinchrom system past, present and future.
 Fully compatible with the creativity demanded by every photographer.



ELB 400 with battery — 424 Ws — N° 10279.1 **ELB 400 without battery** — N° 10278.1



GENERAL ACCESSORIES



Ouadra Action Head N° 20151

Dedicated action flashtube for sharper images - reach an incredible 1/5700 s with an Action head! Includes 2.5m flash cable, Quadra 13.5 cm reflector and multi function cap.



Ouadra Pro Head

N° 20121

Dedicated Pro head for general use and HyperSync™ users. Includes 2.5m flash cable. Quadra 13.5 cm reflector and multi function cap.



Quadra **Ringflash PRO** N° 20495

The ultimate combination for in and outdoor photography! The RQ Ringflash PRO, with 4-pole flashtube, freezes movement with a 1/4500 s (t0.5) at full power. The 2 metre flash cable enables photographers to use it freehand.



Quadra Ringflash ECO – N° 20492

This RQ Ringflash is as portable as a ringflash gets. Accepting up to 400 Ws with a standard 2-pole flashtube, the RQ Ring-flash ECO is an ideal fill light for fashion and beauty photography. A white diffuser cap and a 2 m detachable cable are included.

Quadra Action Plug-In Flashtube N° 24086

High quality, long-life, A-Type (action) flashtube for Quadra Action heads and Hybrid A heads.





N° 24087

High quality, long-life, S-Type (standard) flashtube for Quadra Pro heads and Hybrid S heads.



N° 26600

The RO Portalite octagonal offers a wide soft light, ideal for portraiture, beauty and people photography. Combined with the optional deflector set - gold, silver, translucent and frost - the softness / hardness and colour can be modified. It can even be used as a fold up beauty dish!

Quadra Reflector 56° 18 cm - N° 26056

This reflector combines a high output with a good spread of light while the internal recess accepts 18 cm Grids and supports umbrellas.



Quadra Grid Reflector Set N° 26133

Includes a Quadra reflector 18 cm with a 30° grid for precise lighting control.



The RQ portalite is easy to set up and ultra transportable. This small size softbox offers a nice soft light when used with the outer diffuser. Access to the umbrella holder is maintained to allow for the use of deflectors

Quadra **Reflector 70°**

Ouadra

13.5 cm - N° 26145

This reflector offers a wide-angle light distribution as stand alone or umbrella reflector.



Quadra multifunction cap N° 25100

Three in one: Protection for the LED and flashtube, frosted diffusion of light and filter support, which accepts coloured gelatin filters. The cap fits the RQ 13.5 cm reflector.



Ouadra Reflector Adapter MK-II N° 26342

This new improved adapter enables photographers to use any accessory of the Elinchrom range such as Rotalux softboxes, Indirect Softlites and other Elinchrom accessories.

Protective Cap

N° 25101

This durable protective cap keeps the flashtube and the LED pilot light safe as well as making Quadra the head even more portable!



Tripod Set 52-190cm N° 31050

Super portable tripods ideal to use in conjunction with the ELB system.



EL Boom Arm 63-156 cm N° 31049

Allows the Quadra heads to go places other systems just cannot reach.



LEAD BATTERY ACCESSORIES

LITHIUM BATTERY ACCESSORIES

Lead Battery 12 V 3.6 Ah

N° 19294 This spare Lead-Gel battery

is rock solid and offers up to 140 flashes at full power.





N° 19284 Dedicated to the Lead-Gel

battery 12 V 3.6 Ah. Includes mains adapters for EURO, UK and USA.



Lead Car Charger 12 V N° 11093 Charges the Lead-Gel battery 12 V 3.6 Ah from 12 V car outlets.

Lead Battery Set

N° 19298 Includes charger and battery. Compatible with ELB 400 and all Ranger Quadra's.



Lithium Battery 14 V 4.1 Ah N° 19295

This spare Lithium-Ion battery is very lightweight and offers up to 320 flashes at full power.



Lithium Battery Set N° 19299

Includes charger and battery. Compatible with ELB 400 and all Ranger Quadra's.





14 V Lithium Charger N° 19279


Dedicated charger to the Lithium-lon 14 V 4.1 Ah battery. Includes mains cable.

Lithium Car Charger

N° 11037 Charges the Lithium-Ion battery 14 V 4.1 Ah from 12 V car outlets.



GENERAL ACCESSORIES



Quadra Extension Cable & **Ringflash ECO 1 m** - N° 11005 **2 m** - N° 11006

5 m – N° 11003 **10 m** – N° 11004

NOTE: Extension cables reduce the power output and slow down the flash duration.





Quadra Adapter Cable for Ranger S/A Heads N° 11036 Enables the use of flash heads of the Ranger RX system.

Quadra Adapter Cable for Power Pack Heads

N° 11097 Enables the use of EL Power Pack Flash heads with RQ packs.



Shoulder Strap N° 19287

Air cushioned shoulder strap, adjustable, made of non-slip fabric.



Set Case N° 33200

This carrying case for ELB 400 Sets has a new robust design, with pressure equalization valve, easy large lock opener and a rubberised large handle. This case will keep out dust, humidity and is shock proof.

L x W x H: 55 x 18 x 48.5 cm



N° 19286 Offers carry comfort and protection. The Snappy requires the shoulder strap.

Snappy



ProTec Bag Poly N° 33196

This high quality nylon shoulder bag enables photographers to safely carry and store up to 2 ELB 400 packs with batteries and several Quadra heads and accessories.

L x W x H: 39 x 28 x 37 cm

ELB ~ TO GO SETS



Choose Quadra **Action** head sets when flash duration is crucial and you want to freeze your subject's motion.

Choose Quadra **Pro** head sets when more power is needed on location. These heads are also for use in conjunction with HyperSync[™] enabled triggers.

ELB 400 One Action Head To Go — N° 10412.1 ELB 400 One Pro Head To Go — N° 10413.1

Qty	Code n°	Article
1x	10279.1	ELB 400 Supplied with Lithium-Ion battery charger, sync cord and shoulder strap
1x	20151 / 20121	Quadra Action or Quadra Pro Head Supplied with 2.5 m flash cable, Quadra reflector 13.5 cm and multifunction cap
1x	19350	EL-Skyport transmitter Speed





ELB 400 Two Action Heads To Go — N° 10414.1 ELB 400 Two Pro Heads To Go — N° 10415.1

Qty	Code n°	Article
1x	10279.1	ELB 400 Supplied with Lithium-Ion battery, charger, sync cord and shoulder strap
2x	20151 / 20121	Quadra Action or Quadra Pro Heads Supplied with 2.5 m flash cable, Quadra reflector 13.5 cm and multifunction cap
1x	19350	EL-Skyport transmitter Speed
1x	19295	Spare Lithium-Ion battery
1x	33200	ELB 400 TO GO case

RANGER RX SPEED AS

The Ranger RX Speed AS is a 1100 Ws portable battery pack unit. Recycling at full power in 3 seconds and delivering up to 250 flashes at full power makes this battery unit very powerful. Its 2: 1 asymmetrical output allows fast flash durations while the 7 f-stops power range allows for precise control of light.

Incorporating the most advanced miniaturised components weighing in at 8 kg – and controllable by EL-Skyport remote control, by iDevices[™], computer or by handset, the Ranger RX increases enormously the ease of using light on location. It's weather resistant design is also extremely useful.




Ranger RX Speed AS N° 10267.1S

FEATURES

- EL-Skyport: radio remote control and triggering! Set flash power and switch on/off the modelling lamp with the ELS transmitter speed.
- Unique control from iPod Touch °/iPad °/iPhone ° with the EL-Skyport App via the optional WiFi module!
- Remote Control your Ranger RX units with the EL-Skyport Software, Control up to
- 4 studios of 16 units and access extra features like flash counter or flash delay for second curtain sync and other effects.
- Consistent flash power at any power level.
- 7 f-stop range.
- Power saving, auto cut off to save energy.
- Modelling lamp modes: 15s, 30s & off.

- Photocell adapted to work in bright ambient light.
- Auto dump.
- Battery box quick release, replace batteries in seconds.
- Fast battery recharging time:
 3 hours to full power!
- No memory effect on the battery. The electronics protect the battery from over and complete discharging.
- Battery charger indicator, two green LED's show 100%, one green 50% and one red LED 10%.
- Multivoltage charger with European, USA and UK adapters.
- Moisture resistant rubber protectors.
- Raised sockets complete with cover: the electronics are only in the upper part of the unit.

CONTROL PANEL

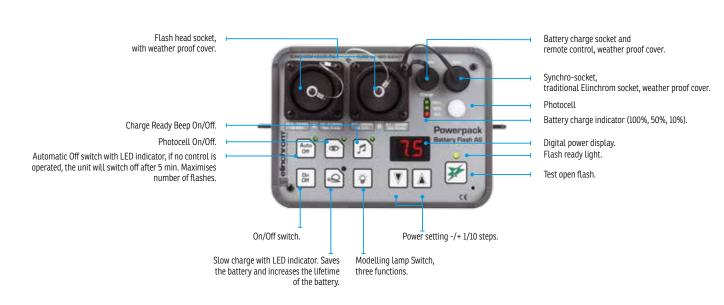

ACCESSORIES FOR RANGER RX SPEED AS





EL-Skyport Transceiver RX Adapter — N° 19374 The Adapter is required for the EL- Skyport Transceiver RX.

Ranger A/S Extension Cable N° 11096 4 m only for Ranger S and A flash heads.



Ranger Adapter Cable — N° 11095 Adapts EL power pack flash heads to the Ranger RX battery packs. (Mains modelling lamp and fan are deactivated.)

Car Battery Charger 12V N° 11093 This device charges the Ranger RX batteries from any 12 V car accessory plugs.





Multivoltage Quickcharger N° 19283S Only for Ranger RX Speed & Ranger RX Speed AS.



Battery Box N° 19280 Includes the battery for approximately 250 flashes at full power.

RANGER RX - TO GO SETS



Ranger Snappy N° 19288 The Ranger Snappy is a lightweight and easy to fit carrying option with an ergonomically designed shoulder strap. Fits to all Ranger RX models.



ProTec Bag Poly N° 33196

This high quality nylon shoulder bag enables photographers to safely carry and store up to 1 Ranger RX Speed As battery pack and 1 Ranger head.

L x W x H: 39 x 28 x 37 cm

Shoulder Strap N° 19289



Power Pack Case

N° 33215 This case fits Ranger RX or Digital RX power packs and two of their flash heads.

TO GO SETS

RANGER RX BASIC SET

A – Ranger RX Speed AS / A Head — N° 10276.1 S – Ranger RX Speed AS / S Head — N° 10273.1

Qty	N°	Article
lx	10267.1S	Ranger RX Speed AS, incl. shoulder strap, battery, sync cord, multivoltage charger, EL-Skyport Remote Adapter
lx	20101 / 20100	Ranger A or S – Head, 50 W modelling lamp, 3 m flash head cable





RANGER RX PRO SET

A – Ranger RX Speed AS / A Head — N° 10287.1 S – Ranger RX Speed AS / S Head — N° 10282.1

Anz.	Art. Nr.	Article
lx	10267.1S	Ranger RX Speed AS, incl. shoulder strap, battery, sync cord, multivoltage charger, EL-Skyport Remote Adapter
lx	20101 / 20100	Ranger A or S – Head, 50 W modelling lamp, 3 m flash head cable
lx	26386	Varistar umbrella set 85 cm, includes Varistar reflector 24 cm
lx	26144	Reflector 18 cm / 60°
lx	33215	EL-Carrying Case
lx	19280	Spare Battery Box

RAPIO REMOTE SYSTEM

EL-SKYPORT SYSTEM

The EL-Skyport system allows photographer's to break free from sync cords and unreliable IR systems. Many improvements have been made to the EL-Skyport system since its launch.

Various levels of function and control are available depending on the units you have: The Universal receiver module can trigger cameras via optional shutter release cables and is compatible with all Elinchrom classic units, most speedlights and most other flash brands for triggering.

Units with built-in Skyport such as D-lite RX One, D-Lite RX 2 / 4, BRX 250 / 500, ELC Pro HD 500 / 1000 and ELB 400 can be triggered and have the additional control of power settings and modelling lamp on/off.


The Digital RX series and the Ranger RX series all require the additional Transceiver RX module to be used, when the control of power settings and modelling on/off is also available. On these units, the SPEED sync mode can be activated via the EL-Skyport Software.

DISTANCE RANGE

Indoors Range

Up to 60 m in Normal sync mode. Up to 40 m in Speed sync mode.

Outdoors Range Up to 120 m in Normal sync mode. Up to 70 m in Speed sync mode.

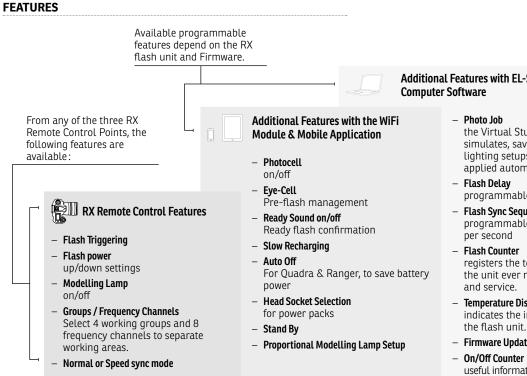

LEGEND

RX Remote Control

The continuous lines show controllable RX features. The RX features available depending on the EL-Skyport module, the flash unit type and the Firmware version.



Universal Receiver Speed

The dashed lines show the general basic features of the Universal Receiver Speed.



RX Remote Control Points

The Transmitter Speed, EL-Skyport computer software and the application for mobile devices can operate and control features and functions of RX flash units, by using the optional USB RX and WiFi modules.



RX Communication Nodes

Are showing the EL-Skyport modules, which enable communication between RX flash units and remote control points such as computers or mobile devices.




EL-Skyport Transmitter Speed N° 19350 **RX** Remote Control Features

Additional Features with EL-Skyport

the Virtual Studio Management simulates, saves and restores studio lighting setups. Unit settings can be applied automatically.

- programmable
- Flash Sync Sequence programmable for up to 20 flash units
- registers the total number of flashes the unit ever made, useful for rental
- **Temperature Display**
- indicates the internal temperature of
- Firmware Update option for RX units.
- useful information for rental and service.

EL-SKYPORT - REMOTE CONTROL SYSTEM

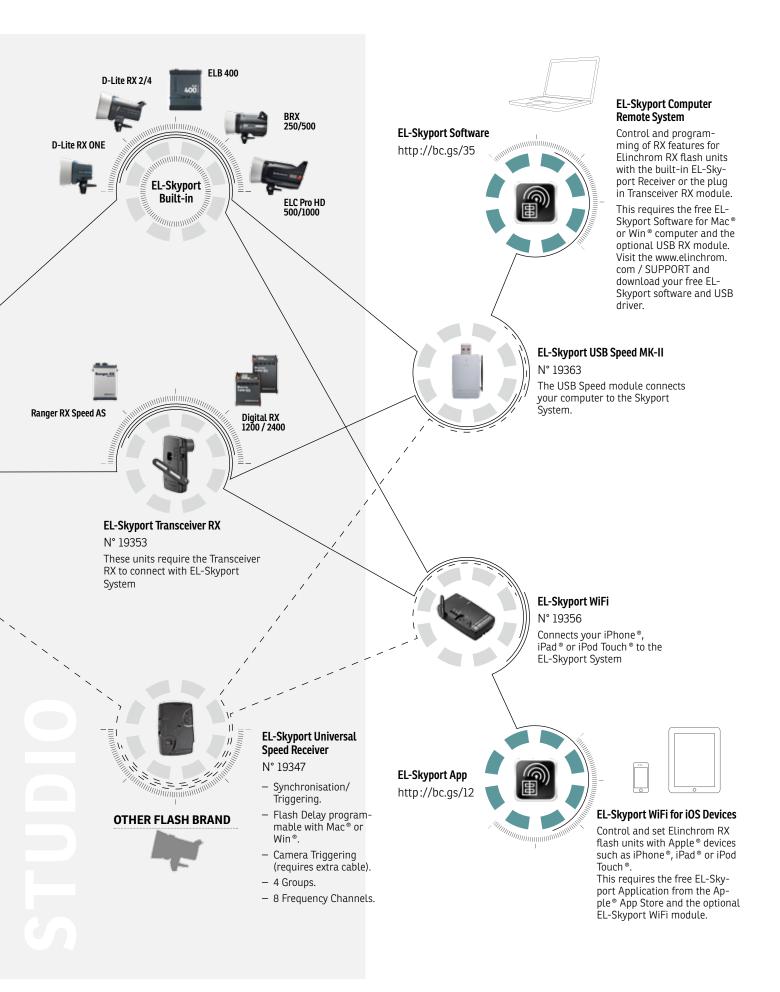

EL-SKYPORT TRANSMITTER SPEED

The ELS Transmitter Speed enables the triggering of units attached via a Universal Skyport module, all units with built-in Skyport and all Elinchrom units to which a Transceiver RX is attached.

The additional control of power settings and modelling lamp on/off can be achieved on all Elinchrom units with built-in Skyport RX (D-Lite RX One, D-Lite RX 2 / 4, BRX 250 / 500, ELC Pro HD 500 / 1000 and ELB 400) and on all Elinchrom units which require the Transceiver RX (Digital RX 1200/2400, and Ranger Speed AS).




EL-Skyport Transmitter Speed N° 19350

FEATURES

- +/- buttons to change flash power settings and modelling lamp on/off.
- Test button for manual flash trigger.
- Switch selection for 8 different frequency channels.
- Switch selection for 4 different groups.
- All switch to control all units within Groups 1 to 4.
- LED status for sync mode and battery level status.

Camera

- Long life Lithium battery provides over 30000 flashes.
- Integrated hot-shoe with screw lock.
- Super small. Only 4 x 5 cm.
- Ultra lightweight. Only 36 g including the battery!



EL-Skyport Transmitter Speed

N° 19350

Set flash power up and down Switch the modelling lamp on/off 4 groups / 8 frequency channels for multi studio operations, within a single work place. Studio

ununun,

RX Flash Units with built-in receiver, transceiver RX and unversal receiver.

20



EL-SKYPORT UNIVERSAL SPEED RECEIVER

The Universal Speed Receiver is compatible with Classic Elinchrom units, most speedlights and most other flash brands. Allow yourself to use your studio flash units with your speedlights!

The Universal Speed Receiver includes a multivoltage charger with Euro, UK and USA mains adapters and EL-Standard sync and 3.5mm jack cables, to connect to other units.

The charger can be connected to the mains whilst the Universal Receiver is in use.


FEATURES

- 30 hours of battery use.
- The Li-Ion battery recharges in approx. 3 hours with the charger included. No need for extra batteries.
- Auto-Standby function when not used for 4 hours.
- Integrated intelligent quickcharge circuit to recover deeply discharged batteries.
- Switch selection for 8 different frequency channels.

- Switch selection for 4 different groups.
- Camera triggering. This feature requires optional camera shutter release cables.
- Recognised by the EL-Skyport software for trigger and flash-delay options.
- Super small.
 Only 6.5 cm x 5 cm.
- Ultra lightweight. Only 54 g including the battery!



To purchase an ELS Universal Receiver REPLACE unit, a used Universal Receiver with a defective or end of life battery must be returned to the dealer. The defective Universal modules will then be recycled at Elinchrom to save the environment. The Universal Receiver REPLACE module does not include sync cables or charger.

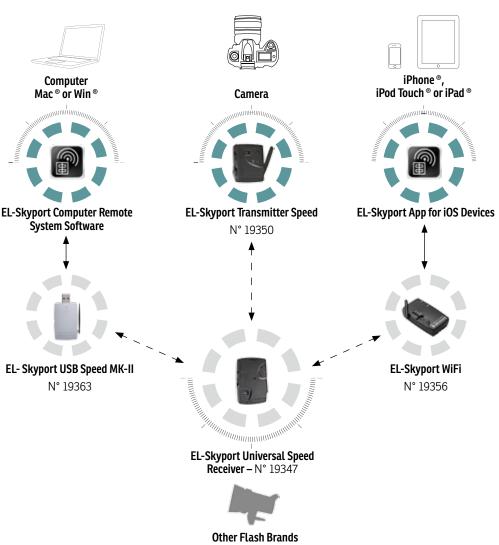

EL-SKYPORT TRANSCEIVER RX

This module fits only to Elinchrom dedicated units such as the Digital RX series, the Ranger RX series and the Style RX series. No extra battery is required for the transceiver to be ready to use. For the Ranger RX series, the ELS Transceiver RX Adapter is required.

This module allows the control of power settings, modelling lamp on/off and flash synchronisation via the ELS-Transmitter. Basic features can also be controlled via Apple[®] devices with the optional WiFi module. Additional features such as flash delay and flash counter can be accessed with the EL-Skyport software.

The Speed mode function is also available for units which require the Transceiver RX via the EL-Skyport software, available as a free download for MAC $^{\circ}$ and WIN $^{\circ}$ at www.elinchrom.com

Computer

Mac [®] or Win [®]


EL-Skyport Computer Remote

System Software

EL-Skyport USB Speed MK-II

N° 19363

Ranger RX Speed AS

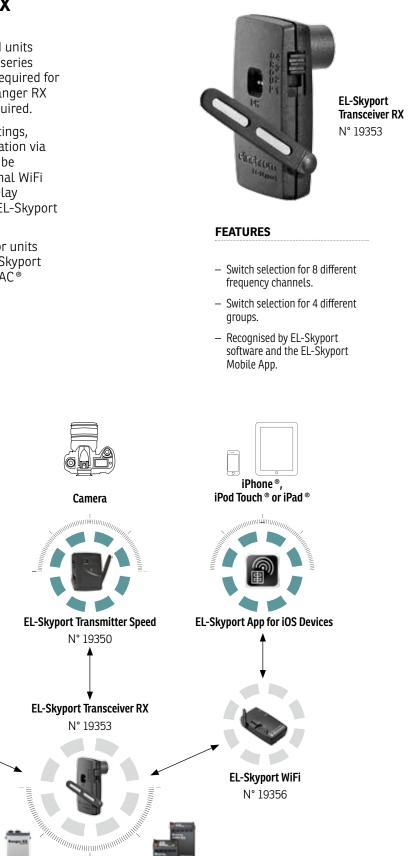

Digital RX 1200 / 2400

THE MOBILE APPLICATION FOR APPLE® DEVICES AND EL-SKYPORT WIFI

Uniquely Elinchrom Skyport. This is the first wireless system which enables the remote control and the remote triggering of Elinchrom RX flash units from Apple[®] mobile devices such as iPhone[®], iPad[®] and iPod Touch[®]. The idea is to use devices for controlling flash units, which already exist in big volume in the market and which many owners consider to be the most practical and user friendly mobile devices ever. All Elinchrom RX units can be controlled but various features are accessible depending on the unit detected.

The Skyport WiFi module is the bridge between Apple® devices and Elinchrom flashes. This module can also act as a Universal Speed Receiver at the same time.



EL-Skyport WiFi N° 19356





EL-Skyport App



Please download the iPhone [®] App from the App Store [®] http://bc.gs/12





RX Flash Units with built-in Receiver, Transceiver RX and Universal Receiver.

FEATURES

- Control features with an Apple[®] device.
- Frequency and group settings are adjustable on the application.
- Shares the same technical specification as the Universal module. See page 29.
- Up to 50 m outdoor in Wifi mode and up to a 100 m in Skyport mode.
- Up to 20 m indoor in Wifi mode and up to 40 m in Skyport mode.
- Wireless firmware update via the EL-Skyport software.

Touch[®]. This requires the free EL-Skyport Application from the Apple[®] App Store and the optional EL-Skyport WiFi

module.

EL-SKYPORT STUDIO MANAGEMENT SOFTWARE

Managing one's studio can get tricky when many lights are involved. The Elinchrom Skyport Software provides the perfect solution. The latest release of the EL-Skyport Software has been developed to help photographers with their workflow.

Available as a free download from our website, the EL-Skyport allows photographers the ability to control all of their Elinchrom RX lighting equipment directly from their MAC[®] or WIN[®] operating systems.



EL-Skyport Studio Management Software Get the software http://bc.gs/35



FEATURES

- Control the functions of all Elinchrom RX units.
- Firmware update.
- Programmable timer.
- ON/OFF flash counter.
- Photo Job studio management.


EL Skyport USB Speed MK-II

N° 19363

By installing the EL-Skyport Software all Elinchrom RX units can be controlled. The program will automatically search for units with Transceiver RX modules or with built-in Skyport RX receivers. The Universal module can also be detected but only offers flash synchronisation.

The latest EL-Skyport software can be downloaded free from our Support section at www.elinchrom.com



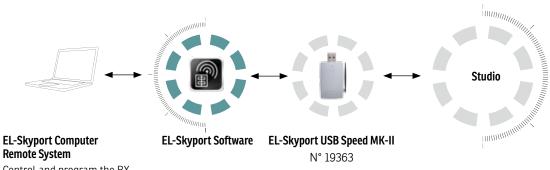

RX Flash Units with built-in Receiver, Transceiver RX and Unversal Receiver.

Control and program the RX features of Elinchrom RX flash units with built-in EL-Skyport Receivers or the plug in Skyport Transceiver RX module.

This requires the free EL-Skyport Software for Mac® or Win® computer, and the optional Skyport USB RX module. Visit the www. elinchrom.com / SUPPORT and download your free EL-Skyport software and USB driver.

EL-SKYPORT UNIVERSAL SPEED TRIGGER SET N° 19357

For classic Elinchrom flash units and other flash brands.

Qty	N°	Article
lx	19350	Transmitter Speed, incl. battery
lx	19346	Universal Receiver Speed
lx	19355	Multivoltage charger with Euro, UK and USA mains adapter
lx	11120	Sync cable 20 cm, 2.5 mm jack – camera pc
lx	11122	Sync cable 40 cm, 3.5 mm - 3.5 mm Jack
lx	11123	Sync cable 40 cm, 3.5 mm jack - EL Standard Sync plug
lx	11126	Sync Adapter 3.5 mm - PC female
lx	11125	Sync Adapter 6.2 mm - 3.5 mm jack







EL-SKYPORT RX TRIGGER SET

N° 19364

Only for Digital RX and Ranger RX battery units.

Qty	N°	Article
lx	19350	Transmitter Speed, incl. battery
lx	19353	Transceiver RX
lx	11120	Sync cable 20 cm, 2.5 mm jack - camera pc

The latest EL-Skyport Software for MAC $^{\circ}$ or WIN $^{\circ}$ operating systems is required, which is available as a free download at www.elinchrom.com. The Ranger RX requires the ELS Transceiver RX Adapter 19374, which is included with every Ranger RX unit.

For further details, upgrades, news, the latest information about the EL-Skyport system and «how to do», please visit the Elinchrom website. In the support area the latest user guides and technical specifications can be downloaded. Technical data, features and functions of Elinchrom flash units and the EL-Skyport system may change without notice. No guarantee for misprints.

CONTINUOUS

SCANLITE HALOGEN 300 – 650 W

The Scanlite Halogen is an excellent choice for low cost digital photography, video and many other imaging requirements.

Often the choice of accessories to personalize the quality of continuous lighting is limited whereas with the Scanlite Halogen, most accessories are available and the Zoom function enables endless possibilities for your lighting! To cool down the whole system, the fan's speed is electronically temperature controlled and almost silent.

FEATURES

- Zoom function allowing more lighting options.
- Can be used either with a 300 W or a 650 W halogen lamp.
- Included transparent glass dome for protection.
- Intelligent low noise fan: The electronically controlled fan spins slower or faster depending on the internal temperature of the Scanlite.
- Multivoltage: The Scanlite can be used with 110 V or 230 V. The correct configuration of halogen lamps and fuse must be used.

- Small, robust and lightweight housing with large ruberrised handle.
- Extra umbrella fitting for other umbrella shaft sizes.
- All Elinchrom reflectors, umbrellas and softboxes (except Portalite softboxes) can be used up to 300 W.
- All Elinchrom metal reflectors can be used up to 650 W (except Snoot reflector, reflectors with grids and fibre optic systems).



SCANLITE Halogen 300 / 650 W N° 20998



Glass Dome Transparent N° 24918

Included standard glass dome for the SCANLITE Halogen.

Glass Dome Frosted N° 24919

The frosted glass dome will soften shadows, offer a wider light distribution and protect the halogen lamp.



SCANLITE HALOGEN SET

N° 20661

Qty	N°	Article
2x	20998	SCANLITE Halogen 300 / 650 W
2x	23022	Halogen lamp 300 W / 230 V
2x	23005	Halogen lamp 650 W / 230 V
2x	24918	Glass dome - transparent
2x	26143	Reflector 90° 16 cm
lx	33196	ProTec Bag Poly
2x	27124	Protective cap
Note	Fuses and halone	en lamps must correspond

elinchrom

Note : Fuses and halogen lamps must correct to the correct voltages!

Optional tripod sets are available. See page 51.



HAPER


LITEMOTIV

The parabolic extension to Elinchrom's softbox range are here. Except that with 16 sides these softboxes produce close to perfect circular catch-lights!

Together with the optional heavy duty bracket, available for different flash brands, for precise and easy positioning, all Elinchrom heads can be fitted for optimum results using every combination of the unique Elinchrom Deflector system. With diameter options of 120 cm and 190 cm, this will be terrific!

FEATURES

- Exclusive fabric for exceptional light quality.
- Sixteen sided softboxes, creating close to perfect catchlights.
- Anodised rod colour coding for faster assembly.
- The strong and stable bracket supports all Elinchrom units.
- Additional brackets are available for Broncolor, Profoto and Bowens.
- Removable rear cover for easier setup and shoot through functionality.
- Two diffusers, inner and outer, for perfectly soft diffusion.
- Without these diffusers, this is a giant beauty dish.
- Unique to Elinchrom, deflectors fine tune the Litemotiv effect.
- Available in 120 and 190 cm.

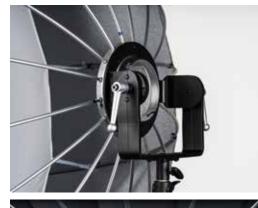



16 Rods

The 16 anodised rods are heat-resistant, enabling work with high temperature light sources. They are made out of flexible aluminium so that they follow the parabolic shape of the Litemotiv. The colour coding of the bracket and rods enable trouble free assembly. These are studio softboxes but their construction make them simple to setup but also to disassemble.

More light

The fabric of the Litemotiv softboxes is unique. It offers more light output than our standard Rotalux fabric, also used for Portalite, while being just as lightweight. It also offers the same distinctive Elinchrom look than our other softboxes but this fabric is heat-resistant, meaning that 650W hot lamps can be used with Litemotiv.

Strength

Designed to carry the Litemotiv 120 cm and the incredible 190 cm, this bracket takes off all stress from the unit while providing easy positioning of the light.

Double diffusion

The double diffusion panels have been specialy designed to produce very soft light. The innner diffuser also incorporates a central circular panel to avoid any hotspot, thus offering the most homogenous light possible.

It is possible to remove both diffusers to obtain a very crispy and contrasty light, similar to beauty dish... but in much bigger!



Litemotiv Softbox Octa 120cm N° 28004

This 120 cm is the big brother of the Rotalux Deep 100 cm. However, with 16 rods, a heavy-duty bracket and 30% more light output with this new fabric, the Litemotiv 120 cm is the ideal light source.

(The Litemotiv bracket is not included and must be ordered separately!)

190 cm of pure deepness. This Litemotiv is the deepest softbox available in the Elinchrom range. (The Litemotiv bracket is not included and must be ordered separately!)



LITEMOTIV BRACKETS

The Litemotiv bracket is a super functionnal and robust solution which offers precise positionning The colour coding enables seamless assembly.

Litemotiv bracket for Elinchrom — N° 26537 Litemotiv Bracket for Profoto — N° 26539 Litemotiv Bracket for Broncolor Pulso — N° 26540 Litemotiv Bracket for S-mount — N° 26538

INDIRECT LITEMOTIV

The Indirect Litemotiv is the industry standard for any location and studio photographer who wants portable and lightweight light shaping solutions with no compromises on quality. The flash unit is fitted indirectly to diffuse in a beautiful, rich and even way bringing life to your images.

The unique folding system allows a speedy setup of the Indirect Litemotiv in any location and with each softbox, there is a high guality carrying included to transport it safely anywhere you go.



FEATURES

- Super fast to set up, with the unique EL folding construction.
- New high quality black/silver _ fabrics, more light, better light distribution and can be used with 650W Halogen modelling lamps.
- All Indirect Litemotiv's are supplied with external diffuser, internal diffuser and carrying bag.
- 360° rotating system.
- Accepts all Elinchrom flash heads including Quadra heads, with Quadra Reflector Adapter 26342.
- Accepts all Profoto[™] flash heads via the EL to Profoto™ Adapter 26333.

INDIRECT SOFTBOX





N° 28001 The Indirect Litemotiv includes the tilthead, 360° rotating system, internal & external diffusers and carrying bag,

already pre-mounted.



Indirect Litemotiv Recta 72x175cm N° 28002 The Indirect Litemotiv includes the tilthead, 360° rotating system, internal & external dif-

fusers and carrying bag, already pre-mounted.



Indirect Litemotiv Strip 33 x 175 cm N° 28003

The Indirect Litemotiv includes the tilthead, 360° rotating system, internal & external diffusers and carrying bag, already pre-mounted.

ROTALUX DEEP INDIRECT

Based on the Rotalux softbox design, the Rotalux Deep Indirect softbox offers a superb crispy light and can be modified to a softer light by using the included diffusers. Just like other Rotalux softboxes, the unit folds down like an umbrella, is easily transportable and can be mounted as a direct softbox with the Rotalux ring which is also included.

FEATURES

- Diameter 150 cm / 73 cm depth (96 cm with tilt head and handle).
- 360° revolving system with lock.
- Delivered set up as an indirect.
- Includes additional EL adapter ring for conversion to direct lighting.
- Includes carrying bag for easy transportation and storage.
- Requires the EL-Tripod 31040 or heavier.
- Optional Hooded Diffuser is available.

Rotalux Deep Indirect 150 cm

N° 26188

Includes internal and external diffuser, Elinchrom Rotalux speedring, translucent deflector and carrying bag.

Hooded Diffuser (optional)

N° 26771 Limits the spread of light for more directional control.



ROTALUX

The rapid assembly Rotalux system is probably the most widely copied of all softbox systems. However, it is easier to copy a design than a quality and the Rotalux softboxes remain the best in their class. They are lightweight and unlike many other softboxes, fold down just like an umbrella and can be easily stored in the carrying bag, which is included.

The quality of light is outstanding because of their construction and the internal diffuser provides the softest and most even light possible. The optional deflector set takes advantage of the unique Elinchrom central shaft to modify the softness / hardness and colour like no other softbox system. Rotalux adapter rings are now also available for other brands of flash.




ROTALUX SOFTBOX



360° rotating system for all Rotalux softboxes

EVERY SOFBOXES COMES WITH:

- Reflective Fabric
- External Diffuser
- Internal Diffuser
- Elinchrom Speed Ring
- RodsCarrying Bag
- Translucent deflector



Rotalux Adapter Rings

Elinchrom users aren't the only ones who can take advantage from the best softbox system. There are now optional adapter speedrings for other brands of studio flash. Only one adapter ring is required for any shape and size of Rotalux.







Deflector Set (gold, translucent, silver, frost) — N° 26310

Elinchrom is the only flash system with the central umbrella fitting, which is essential when Reflectors or Rotalux softboxes are used with Deflector Sets. These accessories can eliminate, soften or tone sharp shadow edges. The set contains four different deflectors; gold, sliver, frost and translucent, each of 14 cm diameter.

N°	Brand
26530	Bowens
26531	Profoto
26532	Broncolor / Pulso
26533	Hensel / Expert EH
26534	Alien Bee / Balcar
26535	Comet
26536	Photona


ROTALUX SOFTBOX

SQUARE

Rotalux square softboxes are good for head and shoulder portraits, products or for use in smaller spaces. The catchlight can be similar to windows.



STRIP Rotalux strip softboxes are great for product photography, especially bottles and other curved reflectives items. They can also be used for ¾ length portraits and are also widely used to light backgrounds where the length helps avoid fall-off from top to bottom.

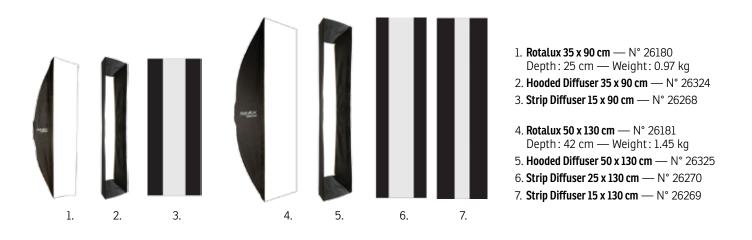

RECTANGULAR

Rotalux recta softboxes are useful for general purpose photography such as portraits and product photography. Because of their shape and size, they provide flexibility and of course, a rectangular catch-light.



OCTAGONAL

Rotalux octa softboxes are very popular amongst beauty and fashion photographers, as they prefer the round catchlight given. You can also create a great folding beauty dish just by removing the front and inner diffusers and adding one of the optional deflectors.



DEEP OCTAGONAL

Rotalux deep octa softboxes have become the most popular shape among Rotalux users. The narrow shaped Deep Octa reduces the spread of light and offers sharper shadows compared to standard sized octagonal softboxes. They provide a very even diffuse light over the front diffuser and are an excellent crispy and direct light when used without diffusers to give a beauty dish look.



- 1. **Rotalux ø 70 cm** N° 26187 Depth: 40 cm — Weight: 0.80 kg
- 2. **Hooded Diffuser ø 70 cm** N° 26770
- 3. **Rotalux ø 100 cm** N° 26185 Depth: 65 cm — Weight: 1.50 kg
- 4. Hooded Diffuser ø 100 cm N° 26328

PORTALITE

The Portalite softbox is an ultra compact softbox with great performance. Portalites are made out of the same quality material as Elinchrom uses for the Rotalux range.

The EL speed ring and rods are designed to give good stability and quick assembly. Portalite is a professional and competitively priced system.

The Portalite series is available in square sizes 40×40 cm and 66×66 cm. There is also a new 56 cm Octa design that works as a small beauty dish when used with the optional deflector set.

Portalite 40 x 40 cm — N° 26123 Portalite Octa 56 cm — N° 26152

Portalite 66 x 66 cm — N° 26129

SPOT ON AT ELINCHROM

Elinchrom Fresnel and Projection spots satisfy many professional needs for sophisticated directional lighting in portrait and commercial photography. High quality projection lenses allow precise and crisp illumination. Usable with any fan cooled Elinchrom head.







FS30

N° 26451

Offering very directional deep shadows with intense colour saturation, 3 dimensionality is guaranteed. Efficient optics and high Swiss precision mechanical engineering insures the highest quality of light. With a lens diameter of 30 cm and a variable angle of 20° to 60°, the Frenel Spot 30 offers a classical cinema light, ideal for fashion and beauty photography. ProTec FS 30 Case N° 33216 included. (Details p.58)

FS30 Accessory Set

N° 26452

The FS30 Accessory Set includes a magnetic filter holder which fits on the front of the FS30 and a choice of ten assorted heat resistant gels in basic colours. The filters can be easily attached with the included 8 magnets.

Zoom Spot 18°– 36° N° 26481

The Zoom Spot has high quality lenses for control of image size and sharpness, complete with four integral masking blades. Various accessories can be fitted and to simplify maintenance, the lenses are easily accessible for cleaning.



Minispot N° 262420S

A hard-edged spot, supplied complete with gobo/filter holder and set of gobo, various shapes. Incl. listed accessories: Set of 5 gobos ø 52.5mm — N° 26418 Filter holder — N° 26422 Lens — N° 26423

Zoom Spot Accessory Set N° 26484

Gobo holder, 10 gobos, 2 front masks, filter holder, set of 10 assorted filters. The ultimate Zoom accessory Set.



FIBRE OPTIC KIT

The captor holds up to three cables, each one metre long and 10 mm in diameter for maximum light transmission. Correctly colour balanced, they are indispensable for most small object-photography whilst they dynamise larger subjects by highlighting or throwing long isolated shadows. Usable with any ventilated Elinchrom head.





FIBRE OPTIC KIT

Qty

lx

2x

2x

2x

2x

N° 26430

Kit	with	two	alass	fibre	cables.
IVIL	VVILII		yiuss	nore	cubics.

N°

26433

50163

26434

26435 26436

Article
Fibre cable adapter
Fibre duct 10 mm x 1 m
Accessory/filter holder
Focussing tube
Lens hood
Adapter f. duct extension

24	20430	Lens nood
lx	26437	Adapter f. duct extension
lx	26438	Set of 10 filters
lx	31150	Quick coupling device
lx	31153	Metal base plate
2x	31161	Articulated arm
2x	31162	Fibre duct holder
2x	31163	Mini holder for accessories
lx	33208	Carrying case

Elinchrom offer a wide range of superbly designed reflectors, compatible with the entire Elinchrom studio flash system. Each reflector is specially designed to do a different job. Decide what you want your lighting to look like and there will be a reflector with precisely the right profile. Elinchrom reflectors are manufactured to the highest specification possible to ensure a long life with endless lightnig possibilities!



Standard Reflector 21 cm 50°

N° 26141 The Standard Reflector combines high output with a good spread of light. The internal recess allows the fitment of high efficiency 21 cm grids.

Barndoor Set 21

N° 26037 Light shaper carrier — N° 26034 2x Barndoors 21 x 15 cm — N° 26009 2x Barndoors 26 x 16 cm — N° 26006






Basic Grid Set 21 N° 26049 Reflector 21 cm 50° — N° 26141 20° Grid — N° 26053 30° Grid — N° 26052

Barndoor Set Pro 21

N° 26039 Light shaper carrier — N° 26034 2x Recta Barndoors 21 x 15 cm — N° 26009 4x Trapezium Barndoors 21 x 15 cm — N° 26005 2x Recta Barndoors 26 x 16 cm — N° 26006





Snoot N° 26061

A traditional accessory, designed to give an approx. 15° controlled spot of light, with a hard shadow effect. Includes one Snoot Grid.



N° 26427

Grids of various honeycomb sizes deliver a sharply defined concentrated light source of exceptional quality. The grid is an easy retro fit, with clips to grip the interior of the snoot.

The Grid necessarily restricts ventilation of the Snoot. Please monitor heat level at all times. High wattage tungsten lamps or high power multi-flashing are liable to cause overheating.



Reflector Grid Set 21 Complete

N° 26051 Reflector 21 cm 50° — N° 26141 8° Grid — N° 26055 12° Grid — N° 26054 20° Grid — N° 26053 30° Grid — N° 26052



Grid Reflector 18 cm 70°

N° 26080 A general purpose reflector for travelling. The internal recess allows the fitment of high efficiency 18 cm grids.

Grid Reflector Set 18 Basic

N° 26060 Reflector 18cm 70° — N° 26080 30° Grid — N° 26100



Grid Reflector Set 18 Complete N° 26135

Reflector 18 cm 70° — N° 26080 30° Grid — N° 26100 20° Grid — N° 26101 12° Grid — N° 26102 Gel holder — N° 26132



REFLECTORS ~ GRIDS



High Performance Reflector 26 cm 48° N° 26137 A bright, high performance reflector, ideal for general sports applications.



Maxi-Lite Reflector 40 cm 43° N° 26147

Ideal for sunlight effects through windows; creates hard and brilliant highlights.

Maxi-Spot Reflector 40 cm 29°

N° 26149

Same shape as the Maxi Lite Reflector but produced with brilliant/glossy reflection material for very high efficiency, throwing light over even longer distances. A narrow powerful beam, which creates deep and sharp, shadows.



Wide Reflector 16 cm 90°

N° 26143

Gives a wide even coverage, excellent for copy work, single light source or large groups photography.

Background Reflector

N° 26165 Delivers an oval pool of evenly distributed light for background and still life. 360° rotation. 32 x 21 cm.



Varistar Reflector 24 cm 90°

N° 26164

Wide coverage with central hotspot. Best use with Varistar umbrella.



Square Reflector Set 44 N° 26048

This is a multifunctional reflector. Without Grid, it is a soft wide angle reflector. Put the Honeycomb Grid in place and you have a soft pool of light ideal for all types of portraiture and small still life subjects. Includes the Grid.

Square Reflector 44 cm N° 26163 Square Reflector Grid 44 cm N° 26057

Protective Cap

N° 27124 To protect modelling lamps and flashtubes for

all heads and compacts.

Bayonet Reflector Support Set N° 22061

This useful set of four bayonet adapter rings accepts all Elinchrom accessories. These

can be safely stored mounted



SOFTLITE REFLECTORS

Beauty dishes, slightly harder lighting than a softbox and giving better definition of facial features, are perfect for close in beauty and portrait work. The included Deflector Set modifies the tone and softness. The light can be further softened with the optional showercap diffuser.



Softlite White Reflector 70 cm 82° — N° 26169 Incl. Deflector Set 26310.

Diffuser Tissue 70 cm N° 26235





Softlite Silver Reflector 70 cm 64° — N° 26167 Incl. Deflector Set 26310.

Softlite Grid 70 cm

N° 26023 Grids give the possibility to control precisely the direction and spread of light while offering sharper shadows.



Barndoor 44x35cm N° 26010 Further controls unwanted light spill. Works perfectly with the Softlite Grids 44 cm, 70 cm,

Square Reflector 44 cm and FS30.

Softlite White Reflector **44 cm 80°** — N° 26168

Incl. Deflector Set 26310.

Diffuser Tissue 44 cm

N° 26232



Softlite Silver Reflector **44 cm 55°** — N° 26166 Incl. Deflector Set 26310.

Softlite Grid 44 cm N° 26021

Grids give the possibility to control precisely the direction and spread of light while offering sharper shadows.





Softlite White & Grid Set 44cm — N° 26900

Softlite Silver & Grid Set 44cm — N° 26901

This high quality nylon bag allows safe storage, shipping and transportation for the Softlite 44 cm reflectors with an extra compartment for the Softlite Grid 44 cm. Built square to provide all the protection needed so that this reflector remains unscratched and undented while in transport. The all-in-one solution for beauty shots.



DEFLECTORS

Elinchrom is the only system with the central umbrella fitting which gives photographers the freedom to easily modify the hardness / softness of their lights. These deflectors can eliminate, soften or tone sharp shadow edges. Very efficient with Rotalux softboxes.



Translucent Deflector 14 cm N° 26305 This deflector helps to smooth any hotspot.

Deflector Set N° 26310 The Deflector Set includes one deflector of each: Silver, gold, translucent, frost and 2x Deflector Rods.



FILTERS

DIFFUSING FILTERS

Add extra softness. Diffusers are available in three sizes. Manufactured from spun glass material to provide resistance to heat.

Diffusing Filters 21 cm

N° 26249 Set of ten filters, to fit the 21 cm Accessory Holder 26034.

Set of filters for FS30

N° 26453

Set of 10 assorted gels in basic colours. They can be fitted on the front of the FS30 with the optional filter holder to bring vivid colour to any photography.

POLARIZING FILTERS

The rotating facility of the Accessory Holder means that Elinchrom flash can successfully be polarized to help control reflections and unwanted highlights. Polarizing filters absorb heat so modelling lamp power must be closely monitored.

Polarizing Filter 21cm — N° 26244

One filter to fit the 21 Accessory Holder 26034.

Colour Gels 21 cm — N° 26243

Colour Gels 21 cm: Set of 10 assorted gels in basic colours. They can be fitted in the 21 cm 26034 to bring vivid colour to any photography.

Colour Gels 21 cm — N° 26255

Set of 10 colour correction gels and diffusion filters

Colour Gels 21 cm — N° 26256

Set of 20 assorted gels in a large panel of colours.

Set of 10 Colour Filters for FS 30 - N° 26453

Set of ten assorted heat resistant gels in basic colours for the FS 30 Accessory holder.

Note: green, blue and purple all absorb heat rapidly and may melt.




VARISTAR 85 & 105 CM

The multitalented umbrella for in and outside the studio! Easy to set up, lightweight and fits into most Elinchrom carrying bags. Ideal for industrial, portraits and groups, the Varistar is even in light distribution and powerful. The umbrella comes with a protective bag and the Varistar Set includes one 26164 Varistar Reflector 24 cm.

UMBRELLAS

With Elinchrom's unique central shaft, Elinchrom umbrella offer the most symmetrical light distribution. All EL-umbrellas are made with non-fluorescent material.

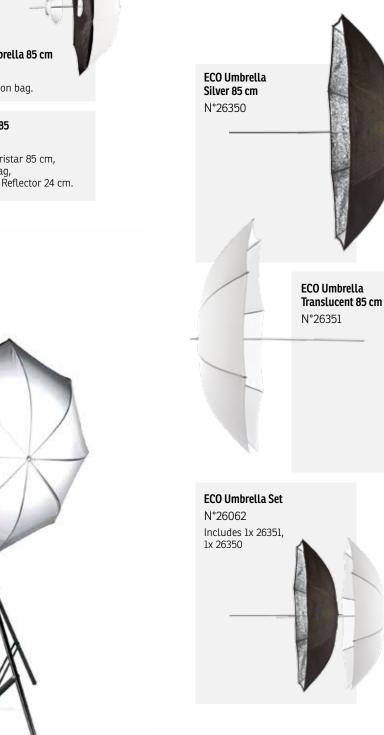

Varistar Umbrella 105 cm N°26384 Incl. protection bag.


Varistar Set 105 N°26385 Includes: Varistar 105 cm, protection bag and

Varistar Reflector 24 cm.

Varistar Umbrella 85 cm N°26383 Incl. protection bag.

Varistar Set 85 N°26386 Includes: Varistar 85 cm, protection bag, and Varistar Reflector 24 cm.



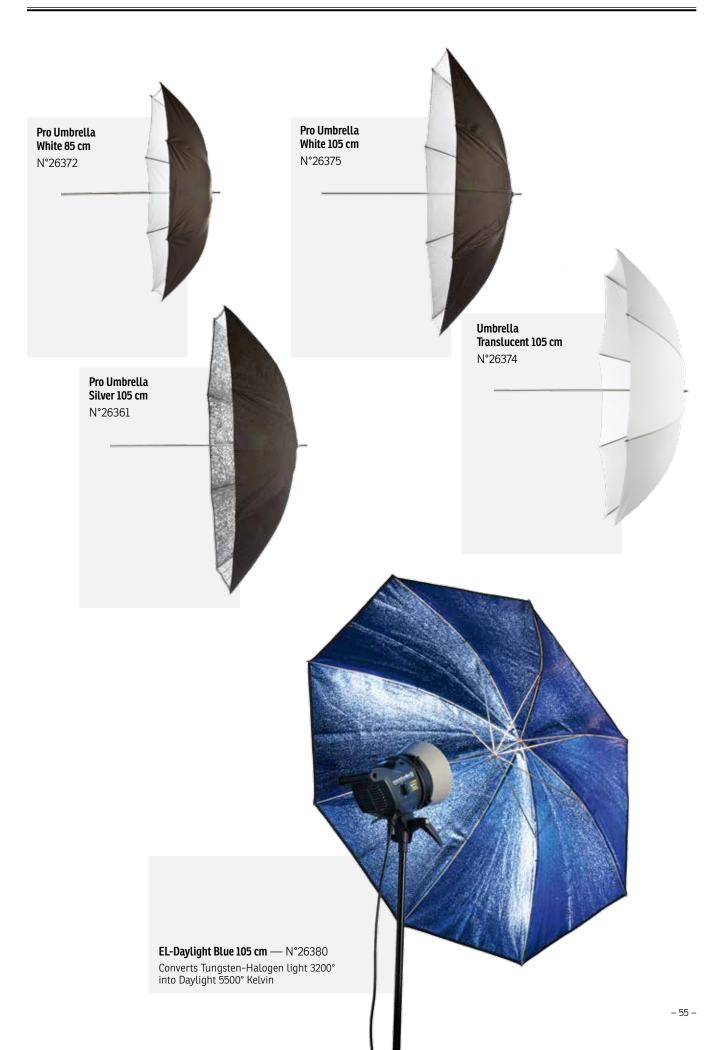







- Max load: 8 kg/Boom 3kg
 Dimensions: 150 x 33 x 21 cm
- Boom: 154 cm

EL-TRIPODS SPECIFICATIONS

	Polystand	EL Tripod Air 105 - 264 cm	EL Tripod 88-235cm	EL Tripod 52-190cm	EL-Boom Arm 63-156cm	EL Tripod Air HD 121-396 cm
Code	31045	31041	30101	31048	31049	31040
Folded size min.	150 cm	105 cm	88 cm	52 cm	63 cm	121
Extention max.	335 cm	265 cm	235 cm	190 cm	156 cm	396
Extras	-	Air Cushioned	-	-	-	Air Cushioned
Boom	154 cm	-	-	-	156 cm	-
Load max.	8 kg/Boom 3kg	6.5 kg	4.5 kg	1.8 kg	2 kg	13.5 kg
Diameter	33 x 21 cm	9.5 cm	8 cm	7.5 cm	3 cm	12 cm
Weight	5.5 kg	2.09 kg	1.72 kg	1.19 kg	0.44 kg	2.7 kg

TRIPODS ~ BAGS

Tripod 88 – 235 cm

N° 30101

The EL stand/sets are dedicated to Elinchrom flash sets and can be ordered separately. Two or three head sets are available.

Tripod Set 2

N° 30162 2x Tripod 88–235 cm N° 30101 1x EL-Carrying bag N° 33230

Tripod Set 3

N° 30161 3x Tripod 88–235 cm N° 30101 1x EL-Carrying bag N° 33220



Tripod 52–190 cm N° 31048

einchrom

The new compact, aluminium lightweight stand is designed for small heads, e.g. the Quadra heads. Weighing only 1.19 kg and 52 cm folded size, this stand is ultra transportable. The EL-Stand Set includes one carrying bag with shoulder strap and two stands. The perfect add on for our Quadra Sets.

Tripod Set 52-190 cm

N° 31050 2x Tripods 52 - 190 cm N° 31048 1x EL-Carrying bag N° 33223



Tripod Air Set 105-264 cm

N° 31052 2x Tripod 105-264 cm N° 31041 1x EL-Carrying bag N° 33222

Tripod Air 105-264 cm

N° 31041 Air cushioned tripods prevent sudden collapse.



Tripod Air HD 121-396 N° 31040

This new air cushioned black aluminium tripod is designed to carry, larger light banks and compact heads up to a height of 396 cm.

Tripod - Umbrella Set To Go

N° 20564 2x Tripod 88–235 cm N° 30101 1x Umbrella translucent 85 cm N° 26351 1x Umbrella silver 85 cm N° 26350 1x EL-Carrying bag N° 33220



EL-CARRYING BAGS

For tripods & umbrellas up to 68 cm — N° 33218 For tripods up to 52 cm — N° 33223 For 3x tripods & umbrellas up to 87 cm — N° 33220 For 2x tripods & umbrellas up to 87 cm — N° 33230 For 3x tripods & umbrellas up to 110 cm — N° 33222 For Indirect Lights ; Octa, Square, Recta & Strip — N° 33221 For Rotalux 26178, 26180, 26183, 26175 — N° 33226 For Rotalux 26179, 26181, 26184, 26176 — N° 33227 For Rotalux 26186 — N° 33228 For Rotalux 26188 — N° 33229

elinchrom





Power Pack Case N° 33215S For all Digital RX packs, all Ranger RX models and 1-2 flash heads.

EL-Skyport Hard Shell Case N° 33000

Elegant hard shell case to protect and carry any Skyport module. L x W x H: 16 x 11.5 x 3 cm

EL-Tube Bag D-Lite RX One N° 33194

Carries and protects up to three D-Lite RX One

EL-Tube Bag D-Lite RX N° 33198

Carries and protects two D-Lite RX 2 / 4

EL-Tube Bag BRX N° 33199

Carries and protects two BRX 250 / 500



ProTec Bag Poly N° 33196

The smart new ProTec Bag is designed to safety transport or store up to two Elinchrom compact flash units, up to two complete Quadra systems, or a combination of head and accessories.

L x W x H: 39 x 28 x 37 cm



ProTec FS 30 Case N° 33216

Designed to protect and transport the FS 30 Spot. Made out of durable nylon with strong chassis, YKK zippers and user replaceable wheels for you conveniance.

L x W x H: 45 x 42 x 54 cm

ProTec Bag Softlite 44

N° 33231

This bag allows safe storage, shipping and transportation of Softlite 44cm reflectors or the Square reflector 44cm with an extra compartment for the Softlite Grid 44 cm.

L x W x H: 90 x 12 x 100 cm



ProTec Rolling Case

N° 33188

The modular compartments of variable sizes make this case a polyvalent solution for any type of equipment. It has been designed to carry safely three compact flash units or even power packs and battery packs with accessories such as tripods and umbrellas that can be attached on the sides. Made out of durable nylon with strong chassis, YKK zippers and user replaceable wheels for you conveniance.

Dimensions: 44.5 x 68.5 x 27 cm (17.5 x 27 x 10.6 inches) Weight: 7.6 kg (16.8 lbs.)



TABLE

EL Notebook-Table

N° 22901

This table supports 13", 15" and 17" laptops and is a useful studio accessory for digital imaging. The base is made of metal and includes a tilt-head which fits any standard tripod with 16 mm spigot. To ensure the best possible stability, the Tripod Air 31041, or heavier is recommended.

Dimensions: width: 50 cm, depth: 28 cm - Weight including tilt-head 1.5 kg -Supports laptops up to 40 cm x 27 cm / 3.5 kg



SYNC CORDS

EL-Sync Cord 5m — N° 11088

Camera pc > 3.5 mm jack EL units with 3.5 mm sync plug: Style, Style S, Style RX, FX, BX, Chic 1/2, Digital 1/2, Digital RX 1200/2400, D-Lite, BXRi and BRX.

EL-Sync Cord 5m — N° 11075 Camera pc > EL-Amphenol Elinchrom standard sync cord for all self-contained (compact) flash units and power packs. Except Style FX, BX, D-Lite, BXRi, BRX and ELC

Pro HD.



Sync Cord Transmitter 20 cm

N° 11120 Camera pc > 2.5 jack This cable connects the EL-Skyport Transmitter or the Prolinca IR-Transmitter with the camera PC socket.





Sync Adapter 6.35 - 3.5 J N° 11125

Sync Adapter 6.35 - 3.5 j. This device converts 6.35 sync plugs to 3.5 mm standard sync sockets. The Sync Adapter is part of the EL-Skyport Universal Set 19360.



Sync Adapter 3.5-PC N° 11126

The Sync Adapter 3.5 mm - PC (female) connects the EL-Skyport Universal Speed Receiver with any other PC (male) sync plug.



EL-Spiral Sync Cord 5m N° 11074

Camera pc > EL-Amphenol Gold plated contacts to increase the connectivity, with a flexible spiral section, for all EL compacts and power packs. Except Style FX, BX, D-Lite, BXRi, BRX and ELC Pro HD.

EL-Sync Adapter 6.35 phone jack 10 cm

N° 11083


EL Amphenol > 6.35 phone jack female. To connect sync cords with 6.35 phone jack. Except Style FX, BX, D-Lite, BXRi, BRX and ELC Pro HD.



EL-FRC Sync Cable-Receiver 50 cm

N° 11072

EL-Amphenol male > 2.5 jack. This cable connects the FRC Receiver 19316 with the EL flash unit. Except Style FX, BX, D-Lite, BXRi, BRX and ELC Pro HD.



3.5 mm jack > EL-Amphenol To hardwire units in case the photocell has a bad reception due to long distance between flash units. For all self-contained (compact) flash units and power packs. Except Style FX, BX, D-Lite, BXRi, BRX and ELC Pro HD.







SPECIFICATIONS

STARTERS

ADVANCED

	D-LITE RX ONE	D-LITE RX 2	D-LITE RX 4		
Energy (Ws/J)	100	200	400		
F-Stop (1m, 100 ISO, reflector 48°)	32.4	45.3	64.3		
Power range f-stop	5				
Power range Ws	6 - 100	12 - 200	25 - 400		
Power range display	1/1 - 1/16				
Power range	0.1 - 4	1 - 5	2 - 6		
Power increments in f-stop	1/10 to programmable 5/10 - 1/1				
Flash duration t0.5 at max. power in s.	1/2200	1/1200	1/800		
Best flash duration at power	-	-			
Recycling 230 V in s.	0.44 – 1.5	0.2 - 0.6	0.35 - 1.2		
Recycling 115 V in s.	0.45 – 2.1	0.2 - 0.8	0.35 - 1.6		
Max. flash per sec. at min. power		-			
Colour temperature in °K at max. power	5500				
Auto Power Dumping	Adjusts power settings automatically				
Power stability	± 0.5%				
Voltage	Multivoltage 90 - 260 V				
Modelling lamp mode	Proportional, min, max, off				
Modelling lamp 230 V	E27 100 W / 196 V (effective 150 W) - 23002				
Modelling lamp 115 V	E27 100 W / 90 V (effective 150 W) - 23006				
Flashtube		n° 24009 : Plug-in, user replaceable			
EL-Skyport (Built-in)	Integrated transcei	ver, 8 Frequency Channels and 4 Groups with full	RX features		
Sync voltage		5 V (compatible with all cameras)			
Sync socket		3.5 mm Jack			
Fan Cooled	Micro	oprocessor controlled fan with thermal cut-out			
Umbrella fitting	Stand bracke	Centred tube for EL-umbrellas Ø 7 mm et with extra umbrella fitting for larger umbrella :	shafts		
Glass dome frosted, optional	-	-			
Max. power consumption (230 V / 50 Hz)	140 W	150 W (during c	harge : 370 W)		
Max. power consumption (115 V / 60 Hz)	170 W 180 W (during charge : 280 W)				
Pure sine battery converter DC/AC : slow charge (W)	· ·				
Dimensions (with protective cap)	19 x 14 x 19 cm	26 x 14 x	19 cm		
Weight	0.9 kg	1.3 kg (2.8 lb.)	1.5 kg (3.3 lb.)		
Supplied with	Mains cable, sync cable, flashtube, modelling lamp and protective cap				
N°	20485.1	20486.1	20487.1		

ENTRY PROFESSIONAL

PROFESSIONAL

BRX 250	BRX 500	ELC PRO HD 500	ELC PRO HD 1000	
250	500	500	1000	
45.8	64.8	64.8	90.8	
5		7	8	
16 - 250	31 - 500	8 - 500	8 - 1000	
1/1 - 1	1/16	1/1 - 1/64	1/1 - 1/128	
1.3 - 5.3	2.3 - 6.3	0.3 - 6.3	0.3 - 7.3	
1/10 to programm	nable 5/10 - 1/1	Adjusted by precise multifunc	tional power knob in 1/10 steps	
1/2762	1/1558	Min. power : 1/2940 Max. power : 1/2330	Min. power: 1/2780 Max. power: 1/1430	
		3.1 (1/5000)	3.6 (1/5260)	
0.29 - 0.73	0.36 - 1.13	Slow: 2.0 Default: 0.75 Fast: 0.6	Slow: 4.0 Default: 1.5 Fast: 1.2	
0.27 – 1.02	0.34 - 1.45	Slow: 2.5 Default: 0.9 Fast: 0.7	Slow: 5.0 Default : 1.8 Fast : 1.4	
-	-	2	20	
		5500		
	Adju	ists power settings automatically		
± 0.1	5%	± 0.1%		
		Multivoltage 90 - 260 V		
		off, free, proportional		
E27 100 W / 196 V (effe	ective 150 W) - 23002	300 W / GX	6.35 - 23022	
E27 100 W / 90 V (effe	ctive 150 W) - 23006	300 W / GX	6.35 - 23030	
n° 24000: Plug-in,	user replaceable	S-Type, Omega Plug-in, user replaceable - 24084		
Integrated transceiver, 8 Frequency Chan		Integrated transceiver, 20 Frequency Channels and 4 Groups with full RX features		
	51	/ (compatible with all cameras)		
		3.5 mm Jack		
Microprocessor controlled		, ,	temperature controlled fan	
		red tube for EL-umbrellas ø 7 mm extra umbrella fitting for larger umbrella shafts.		
-			17 / optional	
150 W (during charge : 380 W)	150 W (during charge : 490 W)			
180 W (during charge: 270 W)	180 W (during charge : 380 W)	Slow: 250 W // Default: 500 W // Fast: 625 W		
-		600 with Halogen 600 with Halogen		
28 x 14 x	(23 cm	31.5 x 14 x 21 cm		
1.85 kg (4.0 lb.)	2.05 kg (4.5 lb.)	2.35 kg (5.2 lb.) 2.9 kg (6.4 lb.)		
Mains cable, sync cable, flashtube, r	modelling lamp and protective cap	Mains cable, sync cable, flashtube, modelling lamp, glass dome, protective cap and reflector 16 cm 90°		
20440.1	20441.1	20613.1	20616.1	

DIGITAL RX

	DIGITAL RX 1200	DIGITAL RX 2400	
Energy (Ws/J)	1200	2400	
Power distribution	Symmetrical		
F-Stop (1m, 100 ISO, reflector 48°)	128	180	
Power range f-stop	6		
Power range Ws	37 – 1200	75 - 2400	
Power range	1/1 - 1	1/32	
Power increments in f-stop	1/1	0	
Flash duration t0.5 with Zoom Pro / Pro HD at max. power in s.	1/1500	1/830	
Flash duration t0.5 with Zoom Action at max. power in s.	1/2800	1/1410	
Recycling 230 V FAST / SLOW in s.	0.24 - 1.0 / 0.35 - 1.9	0.4 - 1.9 / 0.55 - 3.6	
Recycling 115 V FAST / SLOW in s.	0.6 - 1.7 / 0.6 - 2.2	0.6 - 3.8 / 0.8 - 5	
Colour temperature in °K at max. power	5500		
Auto Power Dumping	Adjusts power settings automatically		
Power stability	± 0.5%		
Modelling lamp mode	On, proportio	nal, off, free	
EL-Skyport	External Transceiver RX rec	quired for full RX features	
Sync voltage	5 V (compatible w	ith all cameras)	
Sync socket	3.5 mm Jack and	I EL-Amphenol	
Fan Cooled	All mo	dels	
Max. power consumption (230 V / 50 Hz)	30 W (during charge: 1100 W)	30 W (during charge : 1320 W)	
Max. power consumption (115 V / 60 Hz)	30 W (during charge : 780 W)	30 W (during charge : 940 W)	
Dimensions	22 x 13 x 23 cm	22 x 13 x 32 cm	
Weight	4.6 kg (10.1 lb.)	6.6 kg (14.5 lb.)	
Supplied with Mains cable and Sync Cord		nd Sync Cord	
230 V 50 – 60 Hz N°	10256.1s	10258.1s	
115 V 50 – 60 Hz N°	10255.1s	10257.1s	

DIGITAL RX – ZOOM HEADS

	ZOOM PRO HD	ZOOM ACTION	ZOOM PRO	
Flash capacity (Ws/J)	Up to 4000	Up to	3000	
Compatible power packs		All Elinchrom power packs since 1981		
Flash duration t0.5 on Digital RX 1200	1/1500	1/2800	1/1500	
Flash duration t0.5 on Digital RX 2400	1/830	1/1410	1/830	
Colour temperature in °K at max. power		5500		
Multivoltage		s can be used with either 115 V or 230 V EL and the fuse must apply to the correct volta		
Modelling lamp on/off		All models		
Modelling lamp 230 V	Standard co	nfiguration : 300 W / 230 V Halogen GX 6.35	5 // 23022	
Modelling lamp 115 V	Standard configuration : 300 W / 115 V Halogen GX 6.35 // 23030			
Flashtube	n° 24082: Plug-in, user replaceable n° 24083: Plug-in, user replaceable n° 24081: Plug-in, user replaceable Quartz – Heavy Duty Super short flash duration Quartz – Standard			
Fan cooled	5 5 1	trolled fan. At high internal temperature th e modelling lamp switches back on automa	5 5	
Umbrella fitting		Centred tube for EL-umbrellas ø 7 mm. : with extra umbrella fitting for larger umbr	rella shafts	
Tripod adapter		Standard 5/8"		
Glass Dome Frosted, optional	24919			
Dimensions (with protective cap)		24.5 x 15.5 x 20.5 cm		
Weight	2.3 kg (5.0 lb.)	2.33 kg (5.1 lb.)	2.3 kg (5.0 lb.)	
Supplied with	5 m Flash Cable, Glass Dome transparent, Halogen Lamp and Plug-in Flashtube			
N°	20192 20193 20191			

DIGITAL RX – RINGFLASH

	RINGFLASH 3000
Flash capacity (J/J)	Up to 3000
F-Stop (2m, 100 ISO)	22.5 (Digital RX 1200)
Compatible power packs	All Elinchrom power packs since 1981
Flash duration at max. power t0.5	1/2600 (Digital RX 1200)
Flash duration at min. power t0.5	1/1920 (Digital RX 1200)
Colour temperature in °K at max. power	5500
Flashtube	4 pole - Action
Inner diameter	10 cm
Outer diameter	20 cm
Cable length	5 m
Camera / Tripod adapter	1/4" // 1/4" and 3/8"
Matt glass diffuser, optional	402.013
UV coated protection glass filter, spare part	402.012
Dimensions	23 x 20 x 32 cm
Weight, including cable	1.9 kg (4.1 lb.)
Supplied with	UV coated protection glass filter and flash cable
N°	20494

RANGER RX SPEED AS

Flash capacity (Ws/J)	1100
Power distribution	Asymmetrical, 2:1 ratio
F-Stop (2m, 100 ISO, reflector 48°)	At 100% : 64 At 66% : 45 At 33% : 32
Power range f-stop	8.5
Power range Ws	100% : 17 – 1100 66% : Output A : 11.5 – 733 33% : Output B : 5.7 - 366
Power range	1/1 - 1/64
Power increments in f-stop	1/10
Flash duration t0.5 max. power : 1 / 2 A heads	Output A: 1/2300 / 1/4310 Output B: 1/5120
Flash duration t0.5 max. power : 1 / 2 S heads	Output A : 1/1250 / 1/2250 Output B : 1/2310
Recycling, FAST, in s.	Output A : 0.3 – 3.0 Output B : 0.19 – 1.2
Recycling, SLOW, in s.	Output A : 0.45 – 5.5 Output B : 0.22 – 1.9
Colour temperature in °K at max. power	5500
Auto Power Dumping	Adjusts power settings automatically
Power stability	± 0.5%
Modelling lamp mode	On, 15 s., 30 s., off
Flashes out of one charged battery at min. power, SLOW / FAST recycle	5100 / 3700
Flashes out of one charged battery at max. power, SLOW / FAST recycle	250 / 195
Battery (Lead-Gel)	12 V / 12 Ah
Quick charger : approx. recharge time	3 h
EL-Skyport	External Transceiver RX and 19374 adapter required for full RX features
Sync voltage	5 V (compatible with all cameras)
Sync socket	EL-Amphenol
Dimensions	19 x 14 x 28 cm
Weight	8 kg (17.6 lb.)
Supplied with	19280 + 11075 + 19289 + 19283 + 19374
N° Ranger pack with included parts	10267.1s

ELB 400

Energy (Ws/J)	424
Power distribution	Asymmetrical 2:1
F-stop (1m, 100 ISO, reflector 48°) Pro Head	At 100% : 64.5 At 66% : 45.8 At 33% : 32.8
Power range f-stop	6.9
Power range Ws	100%: 21 - 424 66%: Output A: 14 - 280 33%: Output B: 7 - 140
Power range	1/1 – 1/32
Power increments in f-stop	1/10 to 5/10 - 1/1
Flash duration t0.5 at max. power in s. : Pro/Action head	Output A (100%) : 1/1200 / 1/2800 Output B (33%) : 1/3000 / 1/5700 Output A+B (100%) : 1/1500 / 1/4000
Recycling, FAST in s.	Output A: 0.3 - 1.6 Output B: 0.17 - 0.7
Recycling, ECO in s.	Output A: 0.5 - 3.5 Output B: 0.3 - 1.2
Colour temperature in °K at max. power	5500
Auto Power Dumping	Adjusts power settings automatically
Power stability	± 0.5%
Modelling lamp mode	On, off, programmable timer and continuous
Flashes out of one charged battery at min. power, ECO / FAST recycle	6000 / 5500
Flashes out of one charged battery at max. power, ECO and FAST recycle	350
Battery	Lithium-Ion 14.4 V / 4.1 Ah
Quick charger : approx. recharge time	1h30m
EL-Skyport (Built-in)	Integrated transceiver, 20 Frequency Channels and 4 Groups
Sync voltage	5 V (compatible with all cameras)
Sync socket	3.5 mm Jack
Weight : ELB 400 unit including battery // Battery alone	2 kg // 0.73
Supplied with	Battery, charger, sync cord and shoulder strap
Code number	10279.1

RANGER RX – FLASH HEADS

	RANGER S	RANGER A			
Flash capacity (Ws/J)	Up to 1100				
Compatible power packs	Ranger RX series and Ranger Qua	dra series with Adapter cable 11036			
Flash duration t0.5 1 head at max. power	1/1160 1/2310 on output B of Ranger RX Speed AS	1/2300 1/5120 on output B of Ranger RX Speed AS			
Flash duration t0.5 2 heads at max. power	1/2250	1/4310			
Colour temperature in °K at max. power	5500				
Modelling light on / off	All models				
Modelling lamp	50 W 12 V				
Flashtube N°	24034 : Standard 24053 : Action				
Umbrella fitting	Centred tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts				
Tripod adapter	Standard 5/8"				
Dimensions (with protective cap)	24 x 14 x 21 cm				
Weight, including cable	2.4 kg (5.2 lb.)				
Supplied with	Flash cable, flashtube, modelling lamp and protective cap				
N°	20100	20101			

RANGER RX – RINGFLASH

	RANGER RINGFLASH 1500
Flash capacity (Ws/J)	Up to 1100
F-Stop (2m, 100 ISO)	22.5 (Ranger RX series)
Compatible power packs	Ranger RX series and Ranger Quadra series with Adapter cable 11036
Flash duration at max. power t0.5	1/2600 (Ranger RX series)
Flash duration at min. power t0.5	1/1920 (Ranger RX series)
Colour temperature in °K at max. power	5500
Flashtube	4 pole - Action
Inner diameter	10 cm
Outer diameter	20 cm
Cable length	2 m
Camera / Tripod adapter	1/4" // 1/4" and 3/8"
Matt glass diffuser, optional	402.013
UV coated protection glass filter, spare part	402.012
Dimensions	23 x 20 x 32 cm
Weight, including cable	1.8 kg (3.9 lb.)
Supplied with	UV coated protection glass filter and flash cable
N°	20493

QUADRA – FLASH HEADS

	QUADRA PRO	QUADRA ACTION		
Flash capacity (Ws/J)	Up to 400			
Compatible battery packs	Ranger Quadra series only			
Flash duration t0.5 1 head at max. power	Output A (100%) : 1/1200 Output B (33%) : 1/3000 Output A+B (100%) : 1/1500	Output A (100%) : 1/2800 Output B (33%) : 1/5700 Output A+B (100%) : 1/4000		
Colour temperature in °K at max. power	5500			
Modelling lamp	LED 20 W (approx. 50 W Halogen)			
Flashtube N°	24087: Standard 24086: Action			
Umbrella fitting	Centred tube for EL-umbrellas ø 7 mm.			
Tripod adapter	Standard 5/8"			
Dimensions (with Multifunction Cap)	9 x 8 x 11 cm			
Weight (Head + 2.5 m cable)	0,25 kg + 0,4 kg			
Supplied with	2.5 m flash cable, flashtube Reflector 13.5 cm and Multifunction Cap			
N°	20121	20151		

QUADRA – RINGFLASH

	RINGFLASH PRO	RINGFLASH ECO		
Flash capacity (Ws/J)	400			
F-Stop (2m, 100 ISO)	16.0	11.8 (-0.5 with white diffuser)		
Compatible power packs	Ranger Quad	Ira series only		
Flash duration at max. power t0.5	Output A : 1/1950 Output B : 1/4500	Output A : 1/1000 Output B : 1/2500		
Flash duration at min. power t0.5	Output A : 1/1400 Output B : 1/2700	Output A: 1/600 Output B: 1/1400		
Colour temperature in °K at max. power	5500			
Flashtube	4 pole - Action 2 pole - Standard			
Inner diameter	10 cm 9.5 cm			
Outer diameter	20 cm			
Cable length	2 m			
Camera / Tripod adapter	1/4" // 1/4" and 3/8"			
Matt glass diffuser, optional	Optional, 402.013	Included white Plexiglas diffuser		
UV coated protection glass filter, spare part	402.012	-		
Dimensions	23 x 20 x 32 cm	21 x 20 x 21 cm		
Weight, including cable	1.5 kg (3.3 lb.) 1 kg (2.2 lb			
Supplied with	UV coated protection glass filter and 2m flash UV coated plastic protection filter cable glas diffuser and detachable 2 m			
N°	20495 20492			

SCANLITE

	650	D W	30	D W
Voltage	230 V	120 V	230 V	120 V
Aperture 2m / 100 ISO / 1/30 s 48° Zoom Pos. 0	11	8.0 7/10	8.0	5.6 7/10
Lux	12500	9500	8500	5500
Lumen	20000	20000	9600	8100
Colour temperature in °K		3	200	
Multivoltage	Scanlite Heads can be used with either 110 V or 230 V. Only the Halogen and the fuse must apply to the correct voltages and values!			
Controls	Modelling lamp on/off and Zoom function			
Modelling lamp 230 V	Standard configuration : 300 W / 230 V Halogen GX 6.35 // 23022			
Modelling lamp 115 V	Standard configuration : 300 W / 110 V Halogen GX 6.35 // 23030			
Fan cooled	Electronically intelligent temperature controlled fan. At high internal temperature the modelling switches off. After cooling down the modelling lamp switches back on automatically			
Umbrella fitting	Centered tube for EL-umbrellas ø 7 mm. Stand bracket with extra umbrella fitting for larger umbrella shafts			
Tripod adapter	Standard 5/8"			
Glass Dome Frosted, optional	24919			
Dimensions (with protective cap)	24.5 x 15.5 x 20.5 cm			
Weight	1.2 kg (2.6 lb.)			
Supplied with	Mains cable, Glass Dome transparent and Halogen Lamp 300 W / 650 W			V / 650 W
N°	20998			

MODELLING LAMPS 230 V

Code	Power	Lumen	Av. Life	Туре	Socket	To use with
23002	100 W	1580	1000	Krypton	E27	D-Lite One RX, D-Lite 2 RX, D-Lite 4 RX, BRX 250, BRX 500, Style 100 FX, Style 400 FX
23005	650 W	20000	15	Halogen	GX 6.35	SCANLITE HALOGEN, X6000, Spot Lite 3000
23018	205 W	4200	2000	Halogen	E27	Style 300 RX, Style 600 RX, Mini S
23022	300 W	7900	75	Halogen	GX 6.35	Style 1200 RX, ELC Pro HD, ZOOM PRO, ZOOM PRO HD, ZOOM ACTION, TWIN X4, SCANLITE HALOGEN
23029	625 W	16900	300	Halogen	R7S	Digital RE
23034	200 W	5100	-	Halogen	GX 6.35	Style 600 RX
23035	150 W	2870	2000	Halogen	E27	Style 100/400 BX

MODELLING LAMPS 120 V

Code	Power	Lumen	Av. Life	Туре	Socket	To use with
23006	100 W	1400	1000	Krypton	E27	D-Lite RX, BRX
23019	150 W	2500	2000	Halogen	E27	Style 300 RX, Style 600 RX, Style 1200 RX
23027	650 W	20000	15	Halogen	GX 6.35	X6000
23030	300 W	8100	75	Halogen	GX 6.35	ELC Pro HD, ZOOM PRO, ZOOM PRO HD, ZOOM ACTION, TWIN X4, SCANLITE HALOGEN
23037	150 W	2400	-	Halogen	BA15D	Style 300 RX, Style 600 RX
23038	250 W	5000	-	Halogen	BA15D	Style 1200 RX
23035	150 W	2870	2000	Halogen	E27	Style 100/400 BX

PROBUÇTS





TO GO SET CHART



Softlite White & Grid Set 44cm N° 26900

Reflector Grid Set 21 Complete

Reflector 21 cm 50° — N° 26141

8° Grid — N° 26055 12° Grid — N° 26054 20° Grid — N° 26053 30° Grid — N° 26052

Snoot Grid Set 3 N° 26427

N° 26051

Softlite Silver & Grid Set 44cm N° 26901



- 76 -



nd To Go —	N° 10412.1
`o Go — N°	10413.1

Article

ELB 400 Supplied with Lithium-Ion battery charger, sync cord and shoulder strap

Quadra Action or Quadra Pro Head Supplied with 2.5 m flash cable, Quadra

reflector 13.5 cm and multifunction cap EL-Skyport transmitter Speed

ads To Go — N° 10414.1 To Go — N° 10415.1

Article ELB 400 Supplied with Lithium-Ion battery, charger,

sync cord and shoulder strap Ouadra Action or Ouadra Pro Heads

Supplied with 2.5 m flash cable, Quadra reflector 13.5 cm and multifunction cap

EL-Skyport transmitter Speed Spare Lithium-Ion battery ELB 400 TO GO case

Tripod Air Set 105-264 cm

N° 31052 (Air cushioned) 2x Tripod 105-264 cm — N° 31041 1x EL-Carrying bag — N° 33222

Tripod - Umbrella Set To Go

N° 20564 2x Tripod 88–235 cm — N° 30101 1x Umbrella translucent 85 cm — N° 26351 1x Umbrella silver 85 cm — N° 26350 1x EL-Carrying bag — N° 33220

Tripod Set 52-190 cm — N° 31050 2x Tripods 52 - 190 cm — N° 31048 1x EL-Carrying bag - N° 33223

Tripod Set 2 — N° 30162 2x Tripod 88–235 cm — N° 30101 1x EL-Carrying bag — N° 33230

Tripod Set 3 — N° 30161 3x Tripod 88–235 cm — N° 30101 1x EL-Carrying bag — N° 33220



ELC **PRO HD**

Reinchrom

ELC PRO HD 500/500 TO GO - N° 20666.2

2x	20613.1	ELC Pro HD 500; incl. 300 W Halogen lamp
2x	24916	Glass Dome Transparent
lx	19350	EL-Skyport Transmitter Speed

- lx 11088 Sync cable 5 m
- 2x 26143 Wide Reflector 16cm 90° 1x 33196 ProTec Bag Poly
 - Tripods are not included

ELC PRO HD 1000/1000 TO GO - N° 20667.2

2x 20616.1 ELC Pro HD 1000; incl.	300 W Halogen lamp
-----------------------------------	--------------------

- 2x 24916 Glass Dome Transparent lx 19350 EL-Skyport Transmitter Speed
- 1x 11088 Sync cable 5 m
- 2x 26143 Wide Reflector 16cm 90°
- 1x 33196 ProTec Bag Poly
 - Tripods are not included

EL-SKYPORT UNIVERSAL SPEED TRIGGER SET - N° 19357

1x 19350 Transmitter Speed, incl. battery Universal Receiver Speed Multivoltage Charger with Euro, UK and USA mains adapter Sync cable 20 cm, 2.5 mm jack – camera pc Sync cable 40 cm, 3.5 mm - 3.5 mm Jack Sync cable 40 cm, 3.5 mm jack - EL Standard Sync socket Sync Adapter 3.5 - PC female Sync Adapter 6.2 - 3.5 jack

EL-SKYPORT RX TRIGGER SET - N° 19364

1x 19350 Transmitter Speed, incl. battery

- 1x 19353 Transceiver RX
- lx 11120 Sync cable 20 cm, 2.5 mm jack - camera pc

SPECIAL LIGHT SETS



FIBRE OPTIC KIT - N° 26430 Kit with two glass fibre cables.

1x	26433	Fibre cable adapter
2x	50163	Fibre duct 10 mm x 1 m
2x	26434	Accessory/filter holder
2x	26435	Focussing tube
2x	26436	Lens hood
1x	26437	Adapter f. duct extension
lx	26438	Set of 10 filters
lx	31150	Quick coupling device
1x	31153	Metal base plate
2x	31161	Articulated arm
2x	31162	Fibre duct holder
2x	31163	Mini holder for accessories
lx	33208	Carrying case

CONTINUOUS LITE SETS



SCANLITE HALOGEN SET - N° 20661

2x	20998	SCANLITE Halogen 300 / 650 W	
2x	23022	Halogen lamp 300 W / 230 V	
2x	23005	Halogen lamp 650 W / 230 V	
2x	24918	Glass dome - transparent	
2x	26143	Reflector 90° 16 cm	
lx	33196	ProTec Bag Poly	
2x	27124	Protective cap	



BRX

BRX 250/500 TO GO - N° 20757.2

1x 20440.1 BRX 250

EL-Skyport Transmitter Speed

Portalite Softbox 66 x 66 cm

BRX 500, mains cable, flashtube, modelling

EL-Skyport Transmitter Speed

Portalite softbox 66 x 66 cm

Sync cable 5 m

Tube bag for 2 BRX

BRX 500

lamp

Sync cable 5 m

Tube Bag for 2 BRX

19350

11088

26129

lx 20441.1

lx 19350

2x 26129

1x 33199

lx 11088



